

Lifting & Handling Equipment



FREECALL 1800 750 900

www.mhaproducts.com.au



Battery Electric Platform Work Positioners

- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height
- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing
- Automatic electric overload protection system ensures safe operation
- Load Centre: 237mm
- Platform/ Attachment Size: 475x605mm
- Lifting/Lowering Speed: 55mm/s
- Steering Wheel: 100mm
- Battery: 12x2-10Ah
- Charger: DC-24V-2A




Control Unit

Code	Load Capacity (kg)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2190	100	130-1700	920x505x2160	65
M2191	150	130-1500	920x505x1950	65



Trailer Stabilising Jack Stand


- The Trailer Stabilising Jack is a heavy-duty support system designed to provide unrivalled stability and safety for trailers with a capacity of up to 45 tonnes.
- Engineered for maximum strength and durability, this jack is perfect for use in a wide range of industrial and commercial applications, such as loading docks, warehouses, and transportation hubs
- Top Diameter: 200mm
- 200mm Rubber Wheel

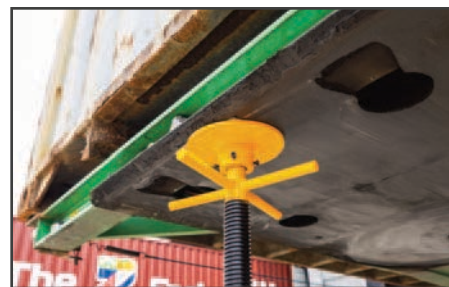

Code	Lifting Capacity (kg)	Static Capacity (kg)	Lifting Range (mm)	Unit Weight (kg)
M2451	18,000	45,000	1003-1295	40

10 Tonne Hydraulic Jack

- Great for jacking up containers & large equipment
- Removable pump hand lever
- The housing rotates 360 degrees

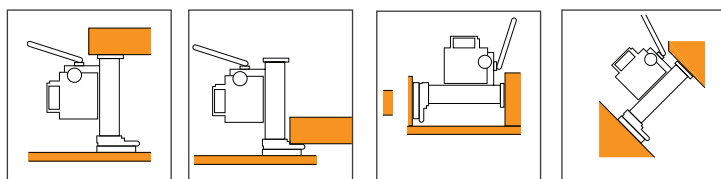

Code	Load Capacity (kg)	Lifting Range of Foot (mm)	Lifting Range of Head (mm)	Maximum Lever Force (kg)	Unit Weight (kg)
M2450	10,000	30-260	420-650	40	35



Compact Ride-On Electric Materials Handling Tug

The Liftex ride-on compact electric tug is the ultimate manual handling solution designed for good's transport for trolleys and anything that is difficult to push or pull around in the hospital, aged care and industrial warehouse environments.

The Liftex Materials Handling Electric Towing Tug is a ride-on unit that doesn't compromise its small size for a ride. Its compact size allows it to be effective in confined spaces, whilst being able to turn on its self. With a very low centre of gravity, the risk of tipping is greatly reduced. Its two front steer wheels create exceptional stability across many rough surfaces.

- Motor Voltage: 24 Volts
- Range: 30-60km



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M1505



Code	Push Capacity (kg)	Pull Capacity (kg)	Overall Size LxWxH (mm)	Wheel Base (mm)	Unit Weight (kg)
M1505	1200	1500	790x660x1340	620	115



1000kg Smart Tow Tug

Great for moving dollies, trolleys and roll cages throughout the warehouse, workshop or shopping centres etc. Compact design which makes it extremely manoeuvrable and easy to transport in vehicles.

- Travel Speed: up to 6km/h
- Programmable speed controller
- Battery: 24v, 18Ah & DC 24v, 300w
- Motor: DC 24v, 300w
- Rear Wheels Solid: 250mm
- Front Wheels Poly: 75mm
- Handle Height: 750-1050mm (adjustable)
- Turning Radius: 475mm



Attachments pictured are supplied as standard with the Tow Tug



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M1500



Code	Traction Capacity (kg)	Width (mm)	Overall Size LxH (mm)	Unit Weight (kg)
M1500	1000	465	810x490	65



See page 84



See page 173



See page 195



Manual Fork/Platform Stacker

- Foot pump hydraulic lift
- Comes with a removable platform and has 2 adjustable fork tines under platform for lifting skids and pallets
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



Adjustable fork tines
for lifting skids and pallets



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Size (mm)	Fork Length (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2230	400	125	75	660x580	650	75-1500	1040x590x1710	85

Electric Fork/Platform Stacker

- Electric hydraulic lift
- Battery: 12v 80Ah
- Comes with a removable platform and has 2 adjustable fork tines under platform for lifting skids and pallets
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes
- Load Capacity: 400kg
- Rear Castors: 125mm
- Front Castors: 75mm



Adjustable fork tines
for lifting skids and pallets



M2231S



M2231

Code	Details	Platform Size (mm)	Fork Length (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2231	Electric Stacker	660x580	650	80-1500	1040x590x1710	120
M2231S	Stainless Steel Electric Stacker	660x580	650	80-1500	1040x590x1710	120




Aluminium Lift Assist Device

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods at height.
- Ideal for lifting items into ceiling spaces or handling machine parts at height.
- Folds for easy storage and transport.
- Manual hand winch control with automatic braking action
- Fits through standard doorways.
- Quick set up – requires no tools.
- Legs fold up for easy storage.
- Arm Length: 800mm
- Load Capacity at a 400mm load centre: 350kg
- Load Capacity at a 1000mm load centre: 150kg



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2241

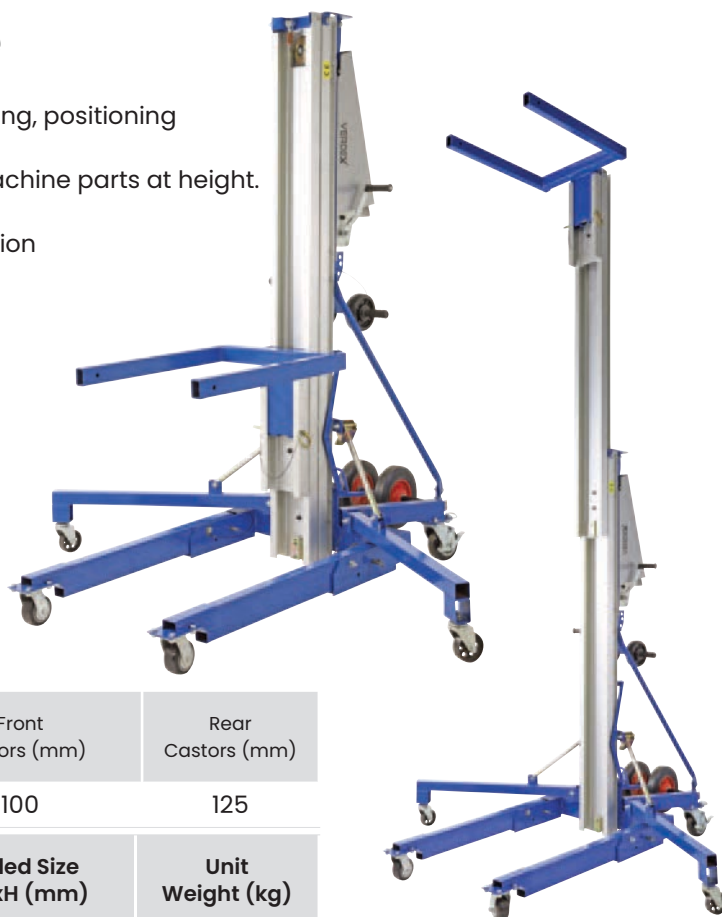

Arm Length (mm)	Ground Clearance (mm)	Operating Length (mm)	Front Castors (mm)	Rear Castors (mm)
800	50	1880	100	125
Code	Min. Height (mm)	Max Height (mm)	Folded Size LxWxH (mm)	Unit Weight (kg)
M2241	150	5000	870x730x2000	145

Aluminium Hand Stacker

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods up to 2500mm in height
- Manual hand winch control with automatic braking action
- Foot pedal brake
- Fits through standard doorways
- Quick set up – requires no tools
- Legs are straddle with quick adjustment



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Length (mm)	Load Centre (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2250	180	200	50	570	254	50-2500	1100x736x1700	66



120KG Fork/Platform Trolley

- Robust, light weight steel construction platform lift trolley which is ideal for lifting heavy items to a work bench level for working on
- The platform is removable and has 2 fork tines which are adjustable under platform for lifting small skids



Supplied with removable platform



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Size (mm)	Fork Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2255	120	200	50	500x420	50x420	95-1050	700x460x137	39

Platform and Fork Lift Trolley

- The ideal trolley for lifting loads up to 150kg with ease
- Complies to relevant Australian Standards
- Swappable accessories for handling of different loads
- Forks for lifting small pallets and skids
- Platform for general lifting
- Patented silent winch which locks the load at any height
- Steel cable which runs inside the mast to prevent pinching
- Puncture proof rear wheels
- Made from aluminium
- Load Capacity (with forks): 150kg
- Load Capacity (with platform only): 120kg
- Platform Dimensions (DxW): 360x420mm
- Fork Dimensions (WxL) : 50x460mm



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M2265



Folded view



M2265



Image shown with optional fork kit (M2266)

Code	Details	Lift Height (mm)	Folded Size LxWxH (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2265	Platform Lift Trolley	1030	300x500x1320	710x530x1320	27
M2266	Fork Kit to suit M2265				



Heavy Duty Manual Fork Stackers

- These manual fork stackers are a very heavy duty construction and are an economical alternative to forklifts
- Manual hydraulic lift via pallet truck style handle or foot pedal
- Straddle leg model for use with standard 1170mm Australian pallets
- Standard leg model for use on Euro pallets and small skids
- Lockable rear wheels are standard on all models




Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2280



Straddle Legs

Standard Legs

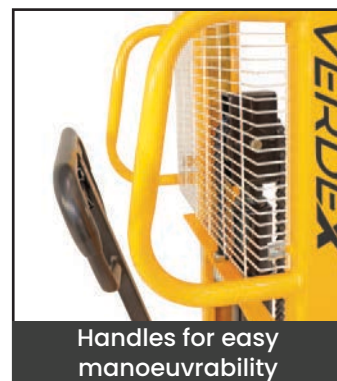

Handles for easy manoeuvrability



Handle pump



Foot pedal pump

Code	Details	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2280	Standard Leg Fork Stacker	500	150	80	90-1600	1640x805x2000	160
M2281	Straddle Leg Fork Stacker	500	150	80	70-1600	1600x1500x2000	225
M2282	Standard Leg Fork Stacker	1000	150	80	90-1600	1640x1000x2085	250
M2283	Straddle Leg Fork Stacker	1000	150	80	70-1600	1560x1450x2050	295



Pallet Turntable Disc

- The Pallet Turntable Disc is designed specifically so that pallets can be placed on or removed from the turntable using only a hand pallet truck
- Lifting lug screws into the centre of the disc and makes transportation of the unit easy.
- Disc Diameter: 1105mm



Code	Load Capacity (kg)	Overall Size HxD (mm)	Unit Weight (kg)
M2145	2000	25x1235	120

Pallet Rotator Ring

- The rotator ring is popular due to its light weight and easy maneuverability.
- It can be moved easily by one person.
- 16 roller bearings to ensure smooth rolling for heavy loads



Suits Pallet Lift Tables



Designed for loading and unloading pallets

Code	Load Capacity (kg)	Overall Size WxH (mm)	Unit Weight (kg)
M2140	2000	1000x65	36



The Edge – Electric Pallet Truck

- The economical option for an electric pallet truck – avoid the strain of manually pushing a pallet standard pallet truck.
- Capacity up to 1500 kg and ability to overcome ramps up to 4/16% (loaded/unloaded) makes the truck suitable for work in loading docks and on delivery operations in different conditions
- The battery for this unit has a 3-6 hour battery life.
- Load Capacity: 1500kgs
- Min Fork Height: 85mm
- Lowered Height: 80mm
- Wheel Type: Polyurethane
- Travel Speed (unloaded): 5.8km/h
- Electric Brake
- Battery: 24V 20Ah
- Brushless AC motor
- Emergency stop button



Capacity up to **1500kg** and ability to overcome ramps up to **4/16%** (loaded/unloaded) makes the truck suitable for work in loading docks and on delivery operations in different conditions



Ideal for use in delivery vehicles



Removable Lithium Battery



Pin can be set so only selected personnel can use the unit



Handle is supported by an air spring for smooth vertical return



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M2388



Code	Details	Load Capacity (kg)	Tine Size (mm)	Length of Tines (mm)	Overall Size LxW (mm)	Unit Weight (kg)
M2388	The Edge (540mm Wide)	1500	47x160x1150	1185	1530x540	123
M2385	The Edge (685mm Wide)	1500	47x160x1150	1185	1530x685	126
M2386	The Edge – Additional Battery 24V/20Ah					
M2387	Extra Battery Charger					4.6



2500KG Industrial Pallet Trucks

- All our pallet trucks come with a maintenance free pump. This means they are all made using high quality parts and German seal kits and are fitted with long life rollers and steering wheels.
- These safety yellow powder coated trucks are available in standard size 685mm wide, narrow pallet size 520mm and small skid size 450mm wide
- Steering Wheel Size: 50x180mm
- Rear steering wheels and fixed front castors



Polyurethane wheels



Nylon wheels



M2322



M2325



M2323

Code	Details	Load Capacity (kg)	Tine Size (mm)	Fork Length (mm)	Width (mm)	Overall Length (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2322	Standard Size - Poly Wheels	2500	50x160	1150	685	1550	85	70
M2323	Standard Size - Nylon Wheels	2500	50x160	1150	685	1550	85	67
M2325	Narrow Size - Poly Wheels	2500	50x160	1150	520	1550	85	60
M2326	Small Skid Size - Poly Wheels	2500	50x160	1150	450	1550	85	66

Low Profile Pallet Truck

- Easy access into low skids and pallets.
- Great for unloading containers with low import type pallets with a low clearance of only 51mm.
- Powder coated safety yellow
- Steering Wheel Size: 50x180mm
- Comes standard with nylon wheels, however polyurethane available on request
- Tine Size (HxW): 470x160mm
- Min Fork Height: 51mm



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M2330



M2329



M2330

Code	Details	Load Capacity (kg)	Fork Length (mm)	Width (mm)	Overall Length (mm)	Unit Weight (kg)
M2330	Low Profile Pallet Truck - Nylon Wheels	1000	1120	685	1550	80
M2329	Low Profile Pallet Truck - Polyurethane Wheels	1000	1120	685	1550	80



Super-Low Profile Pallet Truck

- Easy access into low skids and pallets.
- Great for unloading containers with low import type pallets with a super low clearance of only 35mm.
- Powder coated safety yellow
- Steering Wheel Size: 50x160mm
- Polyurethane rear wheels and steel rollers as front wheels to achieve an extremely low clearance



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2331



Code	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2331	1000	30x160	1120	520	35	100

Extra Long 2000KG Pallet Trucks

- These extra long pallet trucks are extremely useful for extra deep pallets
- Available in 1800 and 2500mm
- Also can be used to pickup two pallets in one lift.
- Tine Size: 60x160mm
- Steering Wheel Size: 50x200mm
- Powdercoated safety yellow
- Polyurethane wheels as standard however nylon wheels can be ordered if required



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2345



Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2345	Extra Long Pallet Truck	2000	60x160	1800	520	85	100
M2346	Extra Long Pallet Truck	2000	60x160	1800	685	85	110
M2347	Extra Long Pallet Truck	2000	60x160	2500	685	85	285



2000kg Galvanised Pallet Trucks

- These galvanised pallet trucks are available in both standard size 680mm wide and Euro pallet size 520mm
- Ideal for the food, chemical and pharmaceutical industry or outdoor use
- Steering Wheel Size: 50x200mm
- Nylon wheels
- Tine Size: 60x160mm



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2335



Code	Details	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2335	Galvanised Pallet Truck (Standard Size)	2000	1120	685	85	67
M2336	Galvanised Pallet Truck (Euro Size)	2000	1150	520	85	65

Stainless Steel Pallet Trucks

- Ideal for the food, chemical and pharmaceutical industry or where corrosive acids are used.
- The front wheels are fully enclosed which is a requirement for clean rooms and food environments.
- Grade of Stainless: 316
- Tine Size: 60x160mm
- Steering Wheel Size: 50x200mm
- Nylon wheels



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2340



Code	Details	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2340	Stainless Steel Pallet Truck (Standard Size)	2000	1150	685	85	77
M2341	Stainless Steel Pallet Truck (Euro Size)	2000	1150	520	85	75



2000KG Pallet Truck With Load Scales

- Our scale pallet trucks are extremely reliable and highly accurate in measuring your pallet weight.
- This fork truck has a totalising function which adds up multiple pallet weights giving the total weight per shipment or order.
- The weighing unit uses four AA batteries which give approx 4200 weighting actions
- The unit gives a low battery warning and shuts off after 3 minutes
- The digital display can be read from any angle in ambient light conditions
- Optional scale printer unit available on request
- Scale Increments: 1kg
- Scale Functions: Zero correction, gross/net weight, total weight
- Nylon Wheels



Watch a video of this in operation
on our website here:
www.mhaproducts.com.au/M2350



Code	Load Capacity (kg)	Steering Wheel Size (mm)	Tire Size (mm)	Fork Length (mm)	Width (mm)	Min. Fork Height (mm)	Overall Size LxW (mm)	Unit Weight (kg)
M2350	2000	50x180	50x182	1150	690	76	1650x690	113

Stainless Steel 2000kg Pallet Truck With Load Scales

- These stainless steel pallet trucks are ideal for applications in the food and medical industries or areas where corrosive acids are used.
- Fully stainless steel – 316 grade
- Scale Increments: 2kg
- Scale Functions: Zero correction, gross/net weight, total weight
- Steering Wheel Size: 50x180mm
- Nylon Wheels



Code	Load Capacity (kg)	Tire Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
M2355	2000	50x182	1150	690	85	138



5 Tonne Heavy Duty Pallet Truck

- These extra heavy duty pallet trucks can be used to move heavy machinery and come with a towing hook for pulling if required
- Steering Wheel Size: 50x200mm
- Powder coated safety yellow
- Steel roller wheel



Heavy duty steel rollers



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M2365



Code	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Unit Weight (kg)
M2365	5000	1150	680	90	200	198

Rough Terrain Pallet Truck

This rough terrain pallet truck is great for applications such as timber yards, brick yards and hard stand areas where the ground is gravel or rough.

- Large pneumatic wheels
- Adjustable Fork Width: 228–735mm
- Width Inside Front Wheels: 1230mm
- Front Wheel Size: 550x132mm (Dia x Width)
- Rear Wheel Size: 265x80mm (Dia x Width)
- Turning Radius: 1500mm
- Axle Distance between Front and Rear Wheels: 973mm



Code	Load Capacity (kg)	Load Centre (mm)	Tine Size (mm)	Fork Length (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2360	1200	450	100x50	860	63	233	1375x1605x1200	245



Manual Hi-Lift Pallet Trucks

- Great for lifting skids and pallets with no bottom rail
- Extremely easy to pump and light weight
- Quick-lift as standard with automatic transfer to normal lifting loads over 150kg
- Automatic descending speed control, regardless of load
- Front support legs and adjustable stabilisers ensure maximum stability
- Heavy duty design
- Conforms to EN 1757-4
- Not suitable for closed pallets with a bottom rail

Stainless Steel option is available as a special order



Code	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Tire Size (mm)	Lifting Range (mm)	Unit Weight (kg)
M2371	1000	1100	520	85	800	50x160	85-800	118
M2370	1000	1150	680	85	800	50x160	85-800	125

Electric Hi-Lift Pallet Trucks

- Great for lifting skids and pallets with no bottom rail
- Quick-lift as standard with automatic transfer to normal lifting loads over 150kg
- Automatic descending speed control, regardless of load
- Front support legs and adjustable stabilisers ensure maximum stability
- Heavy duty design
- Conforms to EN 1757-4
- Not suitable for closed pallets with a bottom rail
- Battery: 12v, 54Ah

Stainless Steel option is available as a special order



Code	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Tire Size (mm)	Lifting Range (mm)	Unit Weight (kg)
M2373	1500	1100	520	85	800	50x160	85-800	150
M2372	1500	1150	680	85	800	50x160	85-800	160



Fork Extension Slippers / Tines (Galvanised)

- Fork slippers extend the versatility of your lift truck
- The safe working load (SWL) is measured per pair at 600mm load centre
- Slippers conform to relevant Australian Standards
- Designed and manufactured in accordance with AS2359.15 and other relevant Australian standard which requires the slippers used for general usage to be not longer than 167% of the supporting tine's length.



Supplied with tine pins to secure slippers to forklift



Code	*SWL (kg)	Length (mm)	Internal Tine Size (mm)	External Tine Size (mm)	HCG (mm)	Weight Per Pair (kg)
M2405	*4500	1780	138x55	150x67	845	66
M2406	*4500	2400	138x55	150x67	1154	88
M2407	*8500	1800	170x76	185x92	830	133
M2408	*8500	2400	170x76	185x92	1154	177
M2409	*8500	3000	170x76	185x92	1454	221

*SWL shown here is the maximum however it varies depending on forklift capacity - Refer to load capacity plate on your forklift

Cable Drum Stirrups

- The M2416 Cable Drum Stirrups is an affordable solution to lift and transport cable drums by forklift.
- Cradle to suit up to 50mm diameter spindles
- Supplied with a 48mm diameter x 1200mm long spindle
- Locking bolt safely secures the drum stirrup in position on forks
- Supplied as a pair
- Enamel paint finish



Code	Working Load Limit (kg)	Max. Fork Arm Width (mm)	Fork Pocket Size (mm)	Unit Weight (kg)
M2416	70	130	150x45	30



Crane / Forklift Spreader Beam

Using a Crane, loads can be lifted via the centre single hook point (as a 'Lifting Beam'), or end lifted using a 2 leg Chain Sling (as a 'Spreader Beam').

If lifting by forklift, the 600mm long slipper pockets allow for fast and safe connection to the truck. The Spreader Beam load connection points are adjustable to 3 positions by moving the extendable arms each end. Both extendable arms are locked into position via safety pins.

The unit is supplied standard with a safety swivel hook each end. The extendable arms are zinc plated with the main body painted in 'safety orange'.



Rated Capacity When used as	Fully Retracted (LC @ 2405mm)	Middle Position (LC @ 3165mm)	Fully Extended (LC @ 3925 mm)
Forklift Attachment	3500kg	1500kg	750kg
Lifting Beam	4500kg	2500kg	1300kg
Spreader Beam	9000kg	7200kg	5600kg

Code	F/Lift HCG (mm)	Rated Capacity (kg)	Fork Pocket Size (mm)	Fork Centres (mm)	Overall Size (mm)	Unit Weight (kg)
M2470	2405	9000	190x65	900	2600x600x410	172

Slip-On Roll Forklift Prong

Slip-on Roll Prong suitable for fabric, cable, carpet and coil products.

These attachments quickly adapt to almost any forklift and require only the connection of a safety chain to prevent unintentional disengagement.

- Prongs are manufactured from solid steel
- Finish: Zinc Plated
- The safe working load (SWL) is measured at 1400mm load centre
- SWL: 510kg



Code	Prong Diameter (mm)	Length (mm)	Fork Pocket Size (mm)	Fork Centres (mm)	HCG (mm)	Unit Weight (kg)
M2415	70	2800	190x65	345	845	163



Fork Spreader with Load Guard

The M2476 fork spreader evenly distributes the load over the length of the attachment with a load back guard to help secure high loads. The slip-on attachment is secured to the lift truck by a safety chain.

- Capacity: 3000kg at 600mm Load Centre
- Load Guard Height: 560mm



Code	Spreader Width (mm)	Spreader Depth (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Tine Size LxWxH (mm)	Unit Weight (kg)
M2476	3000	1200	160x60	872	1050x100x45	255

Forklift Sweeper Attachments

- The fork mounted sweeper is a quick and easy solution for reheaping products such as sand, top soil, grain or similar
- Equiped with ratchet straps to fasten securely on the forklift mast
- HCG: 205mm
- Fork Pocket Size: 218x44mm
- Fork Pocket Centre: 520mm
- Number of Bristle Rows: 8
- Bristle Height: 275mm




Code	Details	Overall Size LxWxH (mm)	Unit Weight (kg)
M6035	1500mm Forklift Sweeper	1500x465x326	75
M6036	1800mm Forklift Sweeper	1800x465x326	85



Bulk Bag Jib (3 Tonne)

- This Bulk Bag Jib is designed to safely handle and move bulk bags by both forklift and overhead crane.
- Versatile design allows easy transfer from forklift to crane and vice versa
- Fitted with four safety swivel hooks for securing the bulk bag straps at 800mm centres
- Allows for one handed connection and disconnection of straps
- Certified to relevant Australian Standards
- Zinc finish

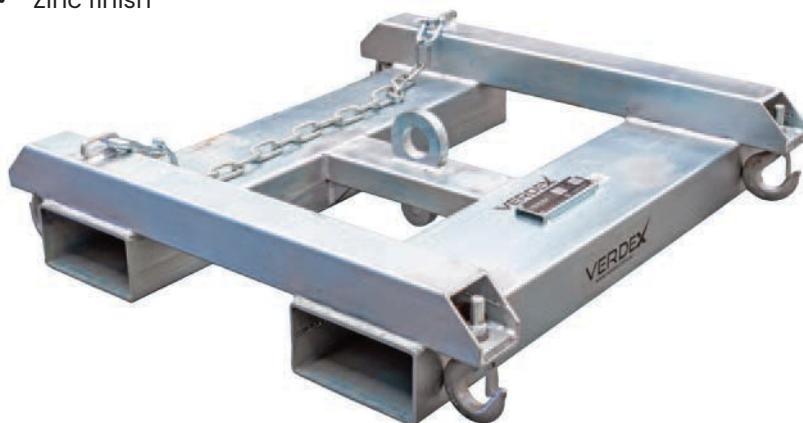

Code	Safe Working Load (kg)	HCG (mm)	Overall Size LxWxH (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M2438	3000	450	900x860x190	190x90	500	85

Bulk Bag Lifter

- Designed for lifting bulk bags by overhead crane
- Enamel paint finish
- Designed with 4 lifting loops for easy positioning of bulk bag
- Suits 80cm standard bulk bags
- Safe Working Load: 2000kg
- Hook Centre 'A': 800mm
- Hook Centre 'B': 1170mm



Code	Safe Working Load (kg)	Hook Centre 'A' (mm)	Hook Centre 'B' (mm)	Unit Weight (kg)
M2537	2000	800	1170	45





Adjustable Pallet Hook (2200kg)

The M2461 Pallet Hook features variable body height and adjustable tine width, making this versatile attachment ideal for the transport and construction industry.

Load balancing is via the moveable lifting ring. The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Adjustable Clearance is the distance between tines and head
- Finish: Zinc plated

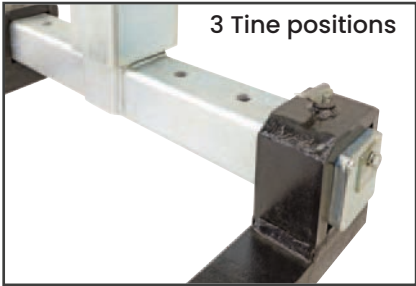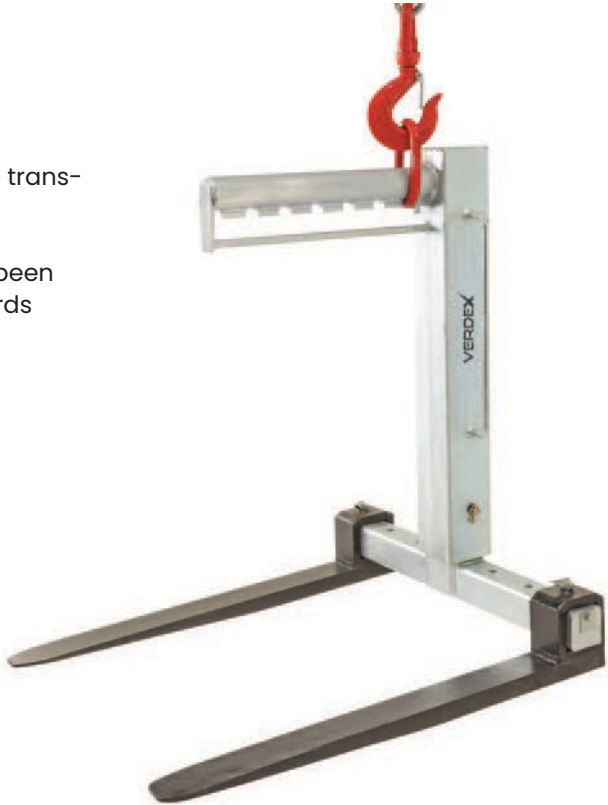

Code	SWL (kg)	Load Centre (mm)	Tine Size (mm)	Adjustable Clearance (mm)	Unit Weight (kg)
M2461	2200	600	100x45x1055	1005-1605	215

Heavy Duty Pallet Hook (4500kg)

A heavy duty 4.5 tonne capacity pallet hook for loads up to 4500kg. Fully adjustable tines makes this unit extremely versatile. Load balancing is carried out by positioning the lifting ring to suit the Centre of Gravity of the load.

Load balancing is via the moveable lifting ring. The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Clearance is the distance between tines and head
- Finish: Enamel painted



Code	SWL (kg)	Load Centre (mm)	Tine Size (mm)	Clearance Between Tines and Head (mm)	Unit Weight (kg)
M2460	4500	600	125x50x1070	1405	456



Automatic Pallet Hook (2000kg)

The automatic pallet hook, type M2462, is self-levelling for ease of operation.

An internal spring mechanism ensures the lifting eye is in the correct position to keep the tines horizontal, eliminating the need to reposition the lifting ring. Enclosed frame members protect the operator from moving parts. The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Clearance is the minimum distance between tines and head
- Finish: Zinc plated




Code	SWL (kg)	Load Centre (mm)	Adjustable Tine Size (mm)	Clearance (mm)	Unit Weight (kg)
M2462	2000	600	100x45x1055	1355	196



4.5 Tonne Telescopic Short Jib

- This 4500kg telescopic short fixed jib is designed as an affordable general purpose jib which is great for confined spaces and has a 1.9 metre reach when fully extended.
- Finish: Zinc plated
- 4 jib positions
- Overall Dimensions at position 1 (LxWxH): 1270x490x250mm

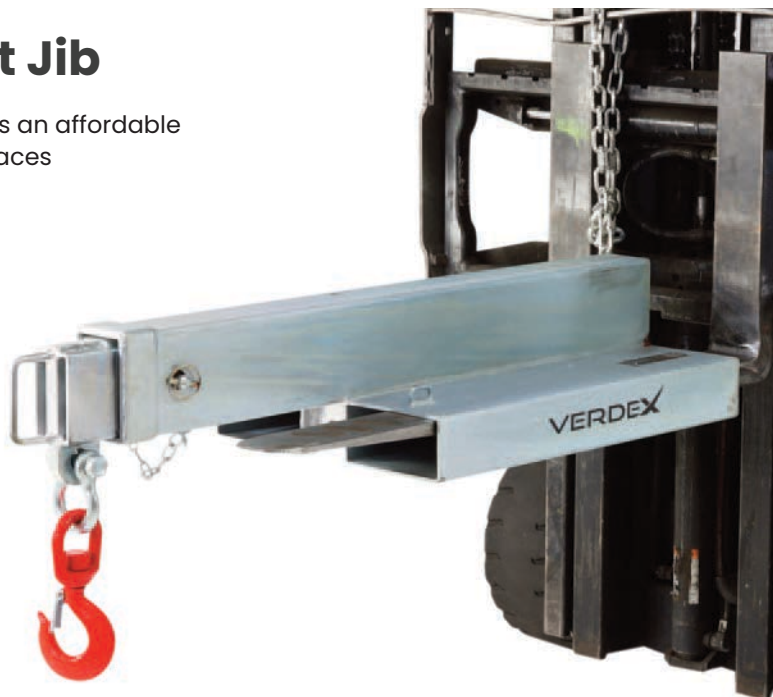

SAFE WORKING LOADS (SWL) PER POSITION

POSITION	1	2	3	4
EXTENSION (mm)	670	1165	1545	1925
SWL (kg)	4500	2900	1300	750

Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M2420	4500	1250	1900	185x65	290	95

4.5 Tonne Telescopic Long Jib

- This 4500kg tonne telescopic jib is a general purpose jib which is great for reaching across pits and areas where the forklift cant drive up to as it has a 3.5 metre reach when fully extended.
- Safe Working Load: 4500kg
- Load Centre: 870mm
- HGC: 836mm
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions at position 1 (LxWxH): 2040x490x250mm



SAFE WORKING LOADS (SWL) PER POSITION

POSITION	1	2	3	4	5	6
EXTENSION (mm)	870	1945	2325	2705	3085	3465
SWL (kg)	4500	1300	750	560	380	200



Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M2421	4500	2000	3500	185x65	290	140



2.0 Tonne Hook & Tow Jib Attachment

This 2000kg hook & tow jib is suitable for most forklifts and is a simple slip-on attachment with safety chain and swivel hook as pictured.

- Safe Working Load: 2000kg at 1160mm load centre
- Finish: Zinc plated
- Maximum weight on towball must not exceed 500kg
- Hook jib has 2 lifting positions
- Overall Dimensions at position 1:
(LxWxH): 1410x420x140mm

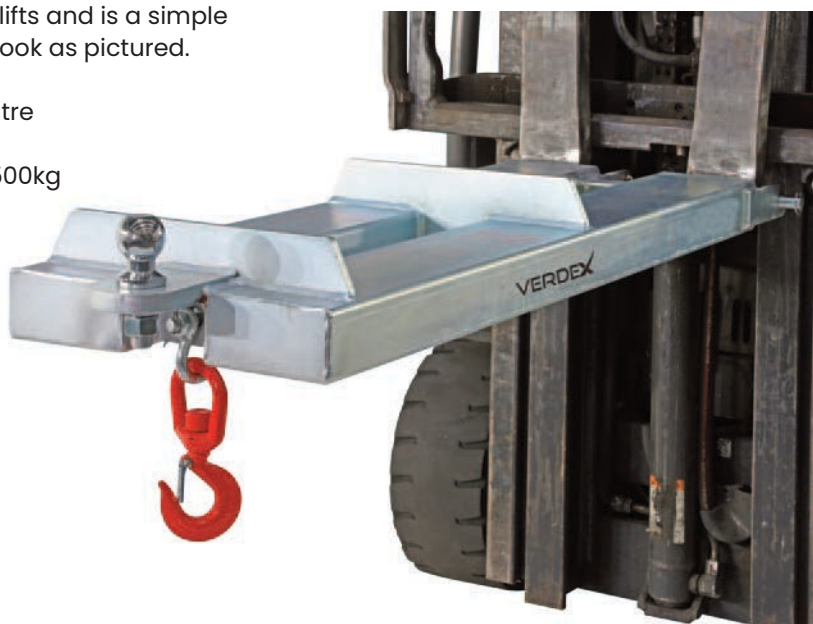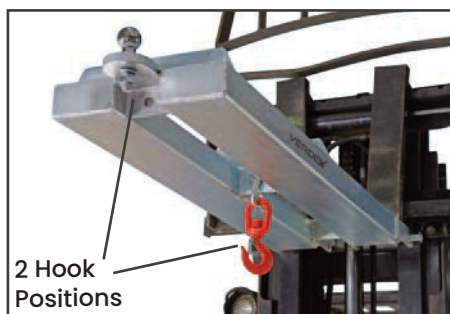

Code	Details	SWL (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Fork Pocket Length (mm)	Unit Weight (kg)
M2429	Hook Jib - 2.0 Tonne Capacity	2000	140x65	250	1220	45
M2430	Hook & Tow Jib - 2.0 Tonne Capacity	2000	140x65	250	1220	45

4.5 Tonne Long Tilting Jib

This 4500kg long tilting jib is the most versatile jib in our range and allows for additional height of up to 2.23 metres.

- SWL chart is show in table
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions at position 1
(LxWxH): 2100x520x650mm
- HGC: 735mm



SAFE WORKING LOADS (SWL) PER POSITION

POSITION	1	2	3	4	5	6
EXTENSION (mm)	770	2010	2390	2770	3150	3530
SWL (kg)	4500	1100	630	470	300	150

Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M2422	4500	2100	3530	185x65	322	190



Deluxe Drum Cradle

- Heavy duty drum cradle with retractable handles for use on 210 litre steel drums
- Great for moving drums around the site and to lay drums into the side position.
- Durable zinc plated finish
- Single person operation
- Wheel Type: Nylon



Code	Load Capacity (kg)	Length (mm)	Width (mm)	Horizontal Height (mm)	Unit Weight (kg)
M5000	300	1000	370	450	14.5

Steel Drum Palletiser

- Loads and unloads drums to and from the corner of a pallet
- Suit steel drums with rim tops
- Locking handle holds weight of drum for easy transport
- Wheel Type: Polyurethane



Code	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5020	365	800x1220x1160	85



See page 249



See page 144



See page 40



Steel Drum Carrier / Rotator

- Remarkably versatile 210 litre Drum Carrier/Rotator Raises, transports, rotates, tilts and drains fully loaded drums
- Lockable in horizontal or vertical position
- Can be turned end over end to agitate contents
- 2 x 200mm roller bearing castors and 1 x 100mm swivel castor



Code	Load Capacity (kg)	Length (mm)	Height (mm)	Width (mm)	Clearance under drum while horizontal (mm)	Unit Weight (kg)
M5005	370	1250	1180	900	370	42

Plastic Drum Carrier / Rotator

- Remarkably versatile 210 litre Drum Carrier/Rotator Raises, transports, rotates, tilts and drains fully loaded plastic drums
- Lockable in horizontal or vertical position
- Can be turned end over end to agitate contents
- 200mm roller bearing castors and 100mm swivel castor




Code	Load Capacity (kg)	Length (mm)	Height (mm)	Width (mm)	Clearance under drum while horizontal (mm)	Unit Weight (kg)
M5006	370	1250	1180	900	370	47




Steel & Plastic Drum Trolley

- This drum trolley suits both steel and plastic 210 litre drums
- Suits plastic drums with a top lip
- Hydraulic handle pump which provides smooth easy lifting



 Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M5015



Code	Load Capacity (kg)	Overall Size LxWxH (mm)	Minimum beak height (mm)	Maximum beak height (mm)	Unit Weight (kg)
M5015	250	820x800x1050	855	1160	42

Steel & Plastic Drum Trolley

- These drum trolleys are ideal for transporting both steel and plastic drums and are available in solid wheel and pneumatic wheels for rough and uneven ground
- This trolley is also self-standing which means the operator can leave without drums falling over
- Wheels: 400mm front, 75mm castors on the rear




Code	Details	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5025	Steel/Plastic Drum Trolley (Solid Wheel)	450	1050x700x750	24
M5026	Steel/Plastic Drum Trolley (Pneumatic Wheel)	450	1050x700x750	28



Steel & Plastic Drum Lifter/Palletiser

- This drum trolley suits both steel and plastic 210 litre drums.
- Spring loaded clamp grabs the drum rib with no manual input
- The lifter has a brake to avoid rolling on sloped areas

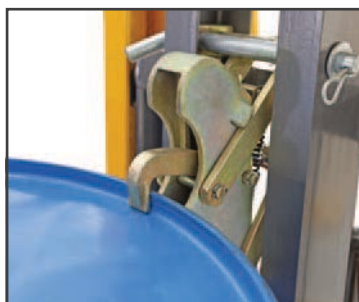

Spring loaded
auto drum clamp



Code	Load Capacity (kg)	Lifting Height (mm)	Length (mm)	Height (mm)	Width (mm)	Unit Weight (kg)
M5030	400	1070	1120	1850	900-1550	100

Drum Palletiser Stackers

- These drum palletisers stackers are great for loading and unloading both plastic and steel drums onto pallets
- Can also be used to stack drums on top of another drum or to place on a truck or ute
- M5036 comes with a battery operated weighing scale which gives you an accurate measurement of the drums weight



M5035

M5036

Code	Details	Load Capacity (kg)	Max Lift Height (mm)	Leg Length (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5035	Drum Palletiser Stacker	450	1100	500	1140x950x1870	130
M5036	Drum Palletiser Stacker (with load scales)	450	1100	500	1150x950x1870	135



Hydraulic Drum Truck

- Easily transport steel drums with this drum truck
- Pallet truck style design
- Nylon wheels



Code	Load Capacity (kg)	Min Arm Height (mm)	Max Arm Height (mm)	Radius of Arm (mm)	Overall Size LxW (mm)	Unit Weight (kg)
M5040	365	270	390	270	1022x722	53

Low Profile Drum Trolley

- This drum trolley has a built in handle which is used for tilting the drum back to push the trolley under.
- Handle has built in bung remover and seal remover
- Wheel Size: 150x50mm (front), 75x32mm (rear)
- Raises drum 25mm



Code	Load Capacity (kg)	Overall Size HxDxW (mm)	Unit Weight (kg)
M5045	500	950x570x750	17

Drum Dollies

- Drum dollies are suitable for both steel and plastic drums and containers
- Powder coated and stainless steel options
- Heavy duty easy wheel castors
- 3 versions available
- Castor Size: 75mm



Code	Details	Load Capacity (kg)	Overall Size LxWxH (mm)	Inner Diameter (mm)	Outer Diameter (mm)	Unit Weight (kg)
M5050	Drum Dollie (Powder coated)	300	710x710x150	600	710	7.5
M5051	Drum Dollie (Stainless Steel)	300	710x710x150	600	710	7.5
M5052	Heavy Duty Drum Dollie (Powder coated)	500	630x630x150	615	630	9



Drum Tongs

- For lifting steel drums with an overhead crane or the fork tine hook
- To operate, set locking lever in locked open position
- Hooks automatically engage when lifted and disengage when the drum is put down
- Suitable for steel drums

Code	Load Capacity (kg)	Jaw Opening Distance (mm)	Unit Weight (kg)
M5055	500	910	8



2.5 Tonne Forklift Tine Hook

- Converts forklift into a mobile crane in seconds
- Adjustable mounting position along the length of the fork
- Secured to forks by thumb screw
- Swivel hook includes safety latch

Code	Load Capacity (kg)	Fork Pocket Size LxW (mm)	Unit Weight (kg)
M2440	2500	150x60	25



Hook Drum Lifter

- Suitable for both steel and plastic 210 litre drums
- Works on almost any drum that has a rim to grab onto
- Ideal for picking up a drum in the middle of a cluster without having to move any that are in front



Code	Load Capacity (kg)	Overall Size HxWxD (mm)	Unit Weight (kg)
M5056	500	215x711x711	13

Drum Sling Lifter

- This sling lifter is ideal for lifting drums and cylinders using an overhead crane or forklift lifting hook device
- Suits up to 210 litre drums
- Supplied with metal head ring

Code	Details	Sling Length (mm)	Unit Weight (kg)
M5057	Drum Sling Lifter - 500kg	1100	3
M5058	Drum Sling Lifter - 1000kg	1100	4



Forklift Geared Drum Rotator

- Converts your forklift into a drum handler
- Suitable for 210 litre steel and plastic drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- Finish: Painted safety yellow
- Drum Size: 570-600mm



Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M5065	300	150x55	825	60

Forklift Drum Rotator

- Converts your forklift into a drum handler
- Suitable for 210 litre steel drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- 3 metre pull chain from operators seat
- 30:1 gearing ratio
- Finish: Painted safety yellow



Code	Load Capacity (kg)	Fork Pocket Size (mm)	Drum Size dia. (mm)	Unit Weight (kg)
M5066	380	180x65	570-600	97



Drum Tipper / Dumper

- Fast and efficient solution to emptying 205 litre steel drums, ideally suited to waste and scrap products
- The drum is secured with the sturdy belly strap & locked in place with the over-centre catch & locking pin
- A rope draw chord is pulled from the driver's seat to dump the drum where required. A custom locking mechanism is fitted to prevent accidental release while driving over bumpy ground
- Rotational ability 180 degrees



Code	Working Load Limit (kg)	Load Centre (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5069	500	1000	185x65	840	1400x1040x600	85

Galvanised Forklift Drum Grab

- Attaches quickly and easily to most fork trucks
- Heavy duty welded steel construction
- Lifts, transports and deposits steel drums without having to leave the drivers seat
- Finish: Galvanised
- Load Centre: 1340mm
- HCG: 824mm



Watch a video of this in operation on our website here:

www.mhaproducts.com.au/M5076



Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M5076	500	165x65	325	78



Forklift Drum Grab

- Attaches quickly and easily to most fork trucks
- Heavy duty welded steel construction
- Lifts, transports and deposits steel drums without having to leave the drivers seat
- Finish: Painted safety yellow

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M5075	680	177x58	330	56





Parrot Beak Drum Lifters

- Suitable for both steel and plastic 210 litre drums
- Simple auto clamp operation, no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Height adjustable for use with different drum shapes
- Available in single and double drum pickups
- Finish: Painted safety yellow



M5080



M5081



Watch a video of this in operation on our website here:


www.mhaproducts.com.au/M5080



Code	Details	Load Capacity per beak (kg)	Fork Pocket Size LxWxH (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M5080	Parrot Beak Drum Lifter (single)	360	750x150x55	500	45
M5081	Parrot Beak Drum Lifter (double)	360	750x150x55	590	62

Galvanised Parrot Beak Drum Lifter

- Suitable for both steel and plastic 210 litre drums with a top lip
- Simple auto clamp operation - no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Finish: Zinc plated
- Load Centre: 1194mm

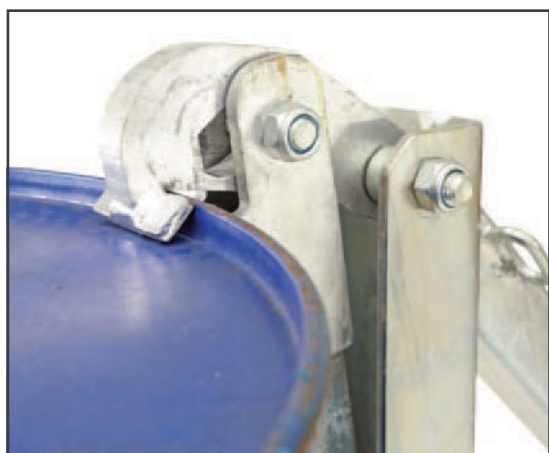

Code	Load Capacity (kg)	Load Centre (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
M5085	1000	1194	185x60	250	68



Drum Positioner

- Suitable for both steel and plastic 210 litre drums
- Can change drum position from vertical to horizontal & vice-versa
- Hinged tines automatically lock when lowered to the ground in horizontal position
- Suitable for loading drums onto transport vehicles
- Works great for loading & unloading drums off rack stands
- Can be operated without the driver having to leave the forklift seat



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M5090



Code	Load Capacity (kg)	Prong Distance Apart (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5090	400	575	150x60	420	1800x700x660	75

Fixed Prong Drum Positioner

- Suitable for both steel and plastic 210 litre drums
- Works great for loading and unloading drums off rack stands



Code	Load Capacity (kg)	Prong Distance Apart (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5091	300	565	140x50	560	1360x715x120	42



Side Shift Drum Palletiser

- The Side Shift Drum Palletiser is specially designed for moving drums and barrels from any position on a pallet.
- It uses a sliding side-shift arrangement allowing it to even be used for moving containers and drums placed in the centre of a pallet.
- The palletiser straddles the pallet and only requires access to one side, thus allowing pallets in confined areas to be kept against the wall even when unloading.
- When moving the drum onto another pallet, scales or the floor, the drum can also be moved to either side using the side-shift arrangement
- This unique design side shift drum palletiser can pickup drums from any position on the pallet, skid or bund -straddles beside and over the pallet
- Suitable for both steel and plastic drums
- The operator requires only 12kg of force on the handle to lift a 300kg drum



Watch a video of this in operation on our website here:
www.mhaproducts.com.au/M5160



Handle lever to lower drum



Foot pedal to raise drum



Code	Load Capacity (kg)	Ground / Pallet Clearance (mm)	Max Lift Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5160	350	350	575	920x1550x1520	168



POPULAR FORKLIFT ATTACHMENTS & LIFTING EQUIPMENT



See page 202



See page 215



See page 251



See page 203



See page 202



See page 206



See page 203



See page 208



See page 205



See page 204



See page 209



See page 204



Steel & Plastic Drum Lifter & Rotator

- This drum lifter can pickup and rotate drums with ease
- Manual foot or handle hydraulic pump for lifting
- Geared rotation using steering handle
- Worm drive handle for drum tilting



Code	Load Capacity (kg)	Lifting Height (mm)	Leg Length (mm)	Distance Between Inner Legs (mm)	Distance Between Outer Legs (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5106	450	1500	770	630	810	1400x1000x2100	190



Electric Drum Lifter & Rotators

These electric drum lifters pickup and rotate drums using battery electric power for both up and down and for tilting.

- Suitable for both steel and plastic drums
- Lifting Speed: 120mm per second
- Rotation Speed: 180° - 30 seconds
- Battery: 12v, 120Ah



Code	Load Capacity (kg)	Max Lift Height (mm)	Leg Length (mm)	Distance Between Legs (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M5150	450	2300	740	630	1600x950x1920	355

