

Lifting & Handling Equipment

MHA
PRODUCTS
MANUAL HANDLING AUSTRALIA

FREECALL 1800 750 900

www.mhaproducts.com.au



Scissor Lift Trolleys (Single Scissor)

LIFTEX

- These units help take the strain out of loading and unloading items from raised levels.
- The table is elevated by a pump action foot pedal and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- The 150kg version code LT8701 has a foldable handle as pictured
- Durable powder coated finish
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



LT8701



LT8702



LT8703



LT8708

Code	Details	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8701	Single Scissor	150	100	700x450	225-730	46
LT8702	Single Scissor	300	125	850x500	340-900	77
LT8703	Single Scissor	500	125	850x500	340-850	81
LT8708	Single Scissor	750	150	1000x510	435-1000	175

Scissor Lift Trolleys (Double Scissor)

LIFTEX

- These units help take the strain out of loading and unloading items from raised levels.
- The table is elevated by a pump action foot pedal and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Durable powder coated finish
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



LT8704



LT8707



LT8705

Code	Details	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8704	Double Scissor	350	125	910x500	380-1330	105
LT8707	Double Scissor	500	150	1010x520	440-1615	168
LT8705	Double Scissor	700	125	1220x610	445-1510	195

Rough Terrain Scissor Lift Trolley

LIFTEX

- Rough terrain scissor lift trolley is ideal for outdoor applications
- Foot Pedal Cycles to Max Height: 25
- Durable powder coated finish
- Rubber castors - 2 x fixed, 2 x swivel with brakes
- Min. Height of Table: 330mm
- Max Lift Height: 1000mm
- Overall Length: 1120mm



Code	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8712	200	200	1000x500	340-1010	71

Electric Scissor Lift Trolleys

LIFTEX

- The battery electric scissor lift trolleys are available in both standard lift and high lift versions and 3 load capacities; 300kg, 500kg and 1000kg.
- Smooth lifting of heavy loads with ease
- Automatic 12v charger
- Push button, battery/hydraulic operation
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



LT7230



LT7233



LT7224

Code	Details	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT7230	Scissor Lift Trolley	300	125	850x500	290-880	115
LT7233	Scissor Lift Trolley	500	150	1010x520	495-1618	198
LT7224	Scissor Lift Trolley	1000	150	1200x800	430-1220	225

Extra Large Scissor Lift Trolleys

LIFTEX

- The extra large scissor lift trolleys are excellent for handling large bulky items.
- The table is elevated by a pump action foot pedal and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Positive braking system on rear wheels
- Durable powder coated finish
- Stepless rate of lowering regardless of load weight
- Available in 500kg and 1000kg load capacities
- LT8720: Polyurethane castors- 2 x fixed, 2 x swivel with brakes
- LT8721: Nylon castors- 2 x fixed, 2 x swivel with brakes



Code	Details	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8720	Scissor Lift Trolley	500	125	1600x810	300-935	154
LT8721	Scissor Lift Trolley	1000	180	2035x750	360-1360	198

Aluminium Scissor Lift Trolley

LIFTEX

- Extremely lightweight - Great for vehicle transport
- Aluminium construction with a painted finish
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Foldable handle
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



Code	Load Capacity (kg)	Castors (mm)	Handle Height (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8713	100	100	1000	700x450	265-755	24

Stainless Steel Scissor Lift Trolleys

LIFTEX

- These stainless steel scissor lift trolleys are great for use in food, pharmaceutical or hygiene areas.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Scissor and pump unit is galvanised
- Stainless Steel Grade 304
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



Code	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Handle Height (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8714	100	100	700x445	1000	250-1220	55
LT8715	350	100	830x500	1000	330-1295	78

Galvanised Scissor Lift Trolley

- Galvanised version which is great for food and medical areas
- Foot operated hydraulic operation
- Lever release control
- Double scissor lift version
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes

LIFTEX


Code	Load Capacity (kg)	Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
LT8706	150	100	830x500	435-1430	80

Spring Scissor Lift Trolleys (With Centre Wheel Kit)

LIFTEX

- Self-leveling, fully adjustable, weight sensitive
- Designed to maintain an ideal working height for assembly lines and loading / unloading operations
- Balance achieved by double springs fitted to the shock absorbers
- Simple to operate spring tension adjustment
- Centre wheel kit is ideal for movement in small spaces
- Polyurethane castors - 2 x fixed centre, 4 x swivel with brakes


M2075

M2076

Code	Details	Load Capacity (kg)	Centre Castors (mm)	Swivel Castors (mm)	Table Size (mm)	Lifting Range (mm)	Unit Weight (kg)
M2075	Scissor Lift Trolley	300	200	100	830x500	360-770	65
M2076	Scissor Lift Trolley	300	200	100	1200x500	360-770	82

Self Propelled Electric Scissor Lift Trolley (With Cage)

- These self propelled lift tables take the effort of having to push heavy items manually as well as having electric operated lift.
- With the centre drive wheel it makes it extremely easy to manoeuvre loads in narrow aisles or tight spaces.
- Comes complete with side cage as pictured which can be easily removed if not required
- 4 x swivel castors with brakes
- 2 x pneumatic centre drive wheels
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds



LIFTEX

Code	Load Capacity (kg)	Castors (mm)	Middle Wheels (mm)	Table Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
LT7240	400	150	275	1000x600	460-900	1240x600x1100	180

Self Propelled Electric Scissor Lift Trolley (Single Scissor)

- Powered Lift and Drive makes this unit ideal for a wide range of applications, including in hospitals and libraries
- 2 x rear swivel castors with brakes
- 2 x pneumatic drive wheels
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds



LIFTEX

Code	Load Capacity (kg)	Rear Castors (mm)	Front Wheels (mm)	Table Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
LT7340	400	150	275	1000x600	460-900	1240x600x1100	180

Self Propelled Electric Scissor Lift Trolley (Double Scissor)

- Double Scissor lift is optimal for reaching high spaces with heavy loads
- 2 x rear swivel castors with brake
- 2 x pneumatic drive wheels
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds



LIFTEX

Code	Load Capacity (kg)	Castors (mm)	Front Wheels (mm)	Table Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
LT7440	400	150	275	1100x600	460-1600	1340x660x1100	234

Self Propelled Electric Scissor Lift Trolley with Cage (Double Scissor)

- These self propelled lift tables take the effort of having to push heavy items manually as well as having electric operated lift.
- With the centre drive wheel it makes it extremely easy to manoeuvre loads in narrow aisles or tight spaces.
- Comes complete with side cage as pictured which can be easily removed if not required
- Includes centre wheel unit
- 4 x swivel castors with brake
- 2 x pneumatic centre drive wheels
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds



LIFTEX

Code	Load Capacity (kg)	Castors (mm)	Middle Wheels (mm)	Table Size (mm)	Lifting Range (mm)	Cage Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
LT7640	400	150	260	1000x600	460-1625	450	1340x600x1055	234

Super Low Profile Lift Tables

LIFTEX

- These lift tables achieve a super low closed height, eliminating the need for a pit installation
- The upper platform is fitted with a safety perimeter to prevent descent on contact with obstructions
- 24v control unit with up/down buttons and emergency stop
- Power supply is AC 415V/50HZ/3phase
- The external power pack is equipped with a relief valve against overloading and a compensated flow valve for controlling lowering speed
- Hose burst safety valve which stops the table lifting in case of a hose breakage



35mm low platform allows easy pallet truck entry



Easy to use controller which sits 900mm off ground level



Code	Load Capacity (kg)	Platform Size WxL (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
LT5003	1500	1200x1270	35-800	1650x1850x235	380

Low Profile Pallet Lift Tables

LIFTEX

- Many applications require the regular loading and unloading of palletised goods.
- Repetitive lifting and stretching can be time consuming and hazardous.
- Using pallet lift tables elevates pallets to the optimum lift height reducing the risk of repetitive strain injury and increasing productivity.
- Supplied with entry ramp to allow pallet truck entry
- Can be supplied with optional rotator ring
- Tables are specially made for handling pallets, no need for a pit or load ramps
- Upper platform fitted with safety perimeter to prevent descent on contact with obstructions
- 24v control box with UP and DOWN buttons and emergency stop
- External power pack equipped with a relief valve against overloading and a compensating flow valve for controlling lowering speed
- Power Supply: 240v (3 phase 415v available if required)
- Hose burst safety valve to stop the lift table lowering in case of hose breakage
- Removable lifting eyes to facilitate handling and installation of the lift table
- Oil-less bushings on pivot points

Easy to use controller which sits 900mm off ground level



Ramp supplied with lift table



Turntables available to suit - see page 138



Code	Load Capacity (kg)	Platform Size (mm)	Lifting Range (mm)	Lifting Time	Unit Weight (kg)
LT7250	1000	1140x1420	85-880	25	357
LT7252	2000	1180x1600	105-880	25	419

Electric Scissor Lift Tables

LIFTEX

Lift tables can be applied in many work places to increase productivity and safety. Loads can be elevated or lowered to optimum heights at the push of a button.

Standard Features

- Heavy duty design and construction
- High quality European power packs
- Suitable for on floor applications or in floor pit applications
- Self lubricating bushings on pivot points
- Removable lifting eyes to facilitate installation and maintenance
- 240V power supply (3 phase available as an option)
- Upper platform fitted with aluminium safety bar preventing descent on contact with obstructions
- Low volt (24v) control box with up-down buttons.
- Internal power pack equipped with relief valve against overloading and compensated flow valve for controlled lowering speed
- Heavy duty cylinders with drainage system and check valve to stop the lift table lowering in case of hose burst
- Safety clearance between scissors to prevent trapping during operation.
- Push button pendant control with up, down and emergency stop

Small Platform Electric Scissor Lift Table

Small platform lift tables are ideal for lifting small products in tight spaces



LT7259

Code	LT7259
Capacity	500kg
Table Size	610x910mm (WxL)
Base Frame Size	450x700mm (WxL)
Min Height	162mm
Max Height	950mm
Raise Time	17-22 seconds
Unit Weight	98kg
Power Supply	240 volt

Other custom sizes available - contact us!

Code	Description
LT7259	Small Platform Scissor Lift Table (500kg capacity)

Single Scissor Electric Scissor Lift Table

Single scissor lift tables for lifting various sized loads.

These tables are ideal for applications where

Code	LT7264	LT7266
Capacity	2000kg	2000kg
Table Size	850x1300mm (WxL)	1000x2000mm (WxL)
Base Frame Size	785x1255mm (WxL)	785x1630mm (WxL)
Min Height	230mm	250mm
Max Height	1000mm	1300mm
Raise Time	20-25 seconds	25-30 seconds
Unit Weight	235kg	315kg
Power Supply	240 volt	240 volt

Other custom sizes available - contact us!

Code	Description
LT7264	Single Scissor Electric Lift Table
LT7266	Single Scissor Electric Lift Table



LT7266



LT7264

Double Scissor Electric Lift Tables

Code	LT7267	LT7242
Capacity	2000kg	4000kg
Table Size	850x1300mm (WxL)	1200x1720mm (WxL)
Base Frame Size	785x1220mm (WxL)	900x1600mm (WxL)
Min Height	360mm	400mm
Max Height	1780mm	2050mm
Raise Time	35-45 seconds	55-65 seconds
Unit Weight	295kg	520kg
Power Supply	240 volt	240 volt

Other custom sizes available - contact us!

Code	Description
LT7267	Double Scissor Electric Lift Table
LT7242	Double Scissor Electric Lift Table



Extra Long Scissor Electric Lift Table

Extra long lift tables are perfect for oversized goods



Code	LT7247
Capacity	2000kg
Table Size	820x2500mm (WxL)
Base Frame Size	640x2460mm (WxL)
Min Height	205mm
Max Height	1000mm
Raise Time	40-45 seconds
Unit Weight	265kg
Power Supply	3 Phase 415 volt

Other custom sizes available - contact us!

Code	Description
LT7247	Extra Long Electric Scissor Lift Table

High-Lift Electric Scissor Lift Tables

High lift scissor lift tables are ideal for moving goods up levels, including on construction sites and to mezzanines

Code	LT7248	LT7249
Capacity	1000kg	400kg
Table Size	1000x1700mm (WxL)	1200x1720mm (WxL)
Base Frame Size	1000x1600mm (WxL)	1000x1600mm (WxL)
Min Height	470mm	600mm
Max Height	3000mm	4140mm
Raise Time	35-45 seconds	30-40 seconds
Unit Weight	450kg	547kg
Power Supply	240 volt	240 volt


Other custom sizes available - contact us!

Code	Description
LT7248	High Lift Electric Scissor Lift Table
LT7249	High Lift Electric Scissor Lift Table




Optional Accessories for Scissor Lift Tables

As well as the following optional accessories, MHA has the capability to manufacture custom solutions for your application. Give us a call on 1800 750 900 to discuss!



Conveyor Bed

Great for use in applications where the goods can be raised then moved onto a bench or production line with ease.



Protection Curtain

These curtains protect the tables working mechanisms from dust, dirt and debris. The bellows are suitable for indoor and outdoor applications. These curtains can also be made with a chain mesh to give extra protection from objects falling into the working area of the lifter.




Side Barrier Rails

We can create a railing which can be used as a goods lift for persons or to bridge the gap between levels. We can create a full railing barrier with a swing open door if required. The up/down controls can be mounted at operator waist height so that they can control from lifter platform level.




Raise and Tilt Platform

The lift table can be fitted with a hydraulic tilt platform with a tilt angle up to 90 degrees. Great for tipping objects into a pit or bin.



Round Turntable

We can mount a turntable to the top of the lift table which is great for putting pallets or objects on with ease of turning for the operator.




Forkable Frame

By mounting the lift table on a frame or blocks as shown in red, you can then move the table easily using either a forklift or pallet truck.



Trolley - Wheels Mounted

We can fit heavy duty lockable castor wheels to the base frame which would convert your lift table into a mobile unit.



Hinged Loading Flap

This can be mounted to the lift table to bridge the gap between loading docks, work areas or vehicles.



Side Barrier Rails

We can create a railing which can be used as a goods lift for persons or to bridge the gap between levels. We can create a full railing barrier with a swing open door if required. The up/down controls can be mounted at operator waist height so that they can control from lifter platform level.



Side Barrier Rails

We can create a railing which can be used as a goods lift for persons or to bridge the gap between levels. We can create a full railing barrier with a swing open door if required. The up/down controls can be mounted at operator waist height so that they can control from lifter platform level.

Spring Loaded Rotating Pallet Tables (Customised Options)



Square top with side protection curtain (LT5097)



Solid round top with side protection curtain (LT5099)



Solid top version (LT5010)




Stainless steel version (LT5012)

Armlift Lift Tables

Armlift's unique patented function offers an ergonomic workplace with ample foot space, comfortable working positions and unrivalled accessibility. Armlift is the perfect choice for almost all workplaces that handle goods and components on pallets, in baskets or containers.

Loads are lifted with parallel arms that can also tilt the load in a single mechanism making Armlift an economical alternative to conventional tables which require separate lift and tilt mechanisms. Because the Armlift tilts down it is especially suited for use with high pallets, oversized baskets and containers.

Visit www.mhaproducts.com.au/Armlift-Lift-Tilt-Tables for more information and operational video

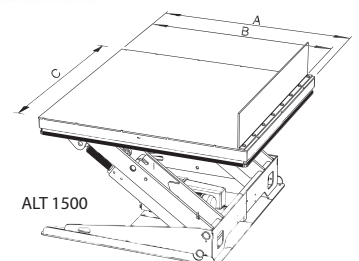

ALT 1500

1800 750 900

Bishamon Pneumatic Rotating Pallet Positioner (For Same Weight Pallets)


- Bishamon automatic work positioners are the modern way to manually load and unload pallets.
- They improve efficiency and reduce injury by bringing the level and location of the top of the load closer to the person doing the work.
- Pallet loading and unloading time can be reduced by 40%, thereby substantially increasing productivity
- Self leveling design automatically keeps the top of the load at a convenient working height
- Rotator ring with integral finger guard eliminates reaching and stretching
- Secured ball bearing centre pivot of the 1092mm diameter rotator ring provides smooth, even rotation
- EZ Loaders arrive at your facility fully assembled – just add air!
- Rotator Ring Diameter: 1092mm
- Minimum Self Levelling Capacity: 113kgs
- Maximum Self Levelling Capacity: 1588kgs



Bishamon®



Bellows Skirting
(EZ-ABS)

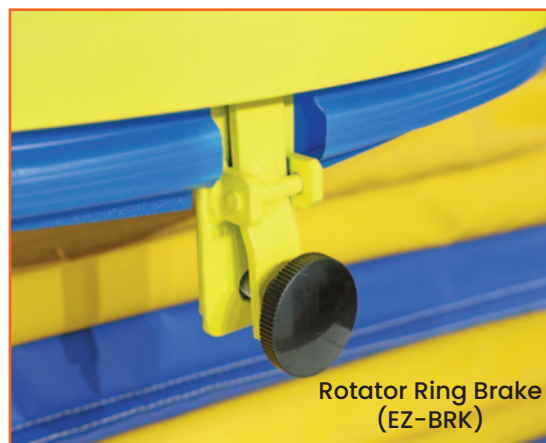

Rotator Ring Brake
(EZ-BRK)

Code	Details	Load Capacity (kg)	Rotator Ring Dia. (mm)	Lifting Range (mm)	Base Frame Size (mm)	Unit Weight (kg)
B1020	EZ X Loader	1814	1092	249-757	1232x610	234
EZ-BRK	Rotator Ring Brake					
EZ-ABS	Bellows Skirting to suit EZ X Loader					

Bishamon Pneumatic Rotating Pallet Positioner (For Varying Pallet Weights)

The most advanced pallet positioner available!

- EZ Loaders are designed to eliminate worker bending by automatically raising and lowering pallets during loading or unloading without the use of mechanical springs, motors or hydraulics.
- The new EZ loader can now handle a wide range of weight capacities from 110 kilos to 1800 kilos.
- The EZ Adjust knob – a three position knob that allows adjustment of the collapsed capacity without changing the air pressure.
- EZ Loaders also allow easy pallet rotation for near-side loading so the worker does not have to reach or strain.
- As the load weight changes, the EZ Loader automatically adjusts, keeping the top of the load at a convenient working height.
- The patented pneumatic system found only on the EZ Loader has proven to be the choice of industry professionals worldwide.



Bishamon®



EZ adjust knob provides up to 550kgs of capacity adjustment with the turn of a knob




Patented self-contained pneumatic system offers unsurpassed performance



Rollers are entrapped in the base frame and platform for added stability



Bellows Skirting
(EZ-ABS)

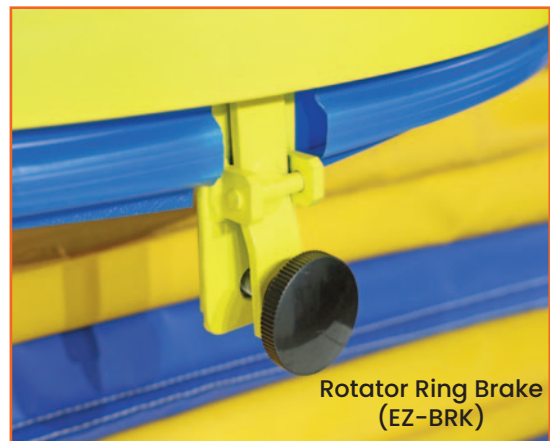

Rotator Ring Brake
(EZ-BRK)

Code	Details	Load Capacity (kg)	Rotator Ring Dia. (mm)	Lifting Range (mm)	Base Frame Size (mm)	Unit Weight (kg)
B1030	EZ Loader	110-1800	1092	267-775	1245x617	172
EZ-BRK	Rotator Ring Brake					
EZ-ABS	Bellows Skirting to suit EZ Loader					

Spring Loaded Rotating Pallet Tables

LIFTEX

- The pallet elevator keeps the active layer of the load at or above waist height, eliminating bending and lifting.
- This pallet elevator can be moved with a standard Pallet Truck
- It is proving highly effective at reducing the incidences of repetitive strain and back injury.
- The construction of the pallet elevator is a scissor type action with varying springs which can be adjusted for different heights
- Turntable allows the operator to rotate the load with minimal stretching and reaching.
- No ground fixing required
- Available in Galvanised or Powder Coated finishes
- Fork Pocket Centres: 615mm



Ready to load



Beginning loading



Partly loaded



Fully loaded


M2134
(powder coated model)

M2135
(galvanised model)


PVC Protection screen supplied standard

Rotating Tops (can be fixed if required)

Springs to suit a wide range of pallet weights

Easy spring changing lock mechanism

Fork pocket centres for easy relocation

Code	Details	Load Capacity (kg)	Table Diameter (mm)	Lifting Range (mm)	Fork Pocket Size (mm)	Unit Weight (kg)
M2134	Powder coated	2000	1110	290-750	300x90	195
M2135	Galvanised	2000	1110	290-750	300x90	195


Rotatable Electric Lift Table

LIFTEX

- The pallet elevator is electric up and down via foot pedal and manual rotating top
- It is ideal for varying weight pallets as there is no need to change springs
- Turntable allows the operator to rotate the load with minimal stretching and reaching while controlling the up/down operation via the foot pedal controls
- Can be easily moved around factory with a forklift
- No ground fixing required
- Power: 240V



Foot Pedal to raise and lower platform

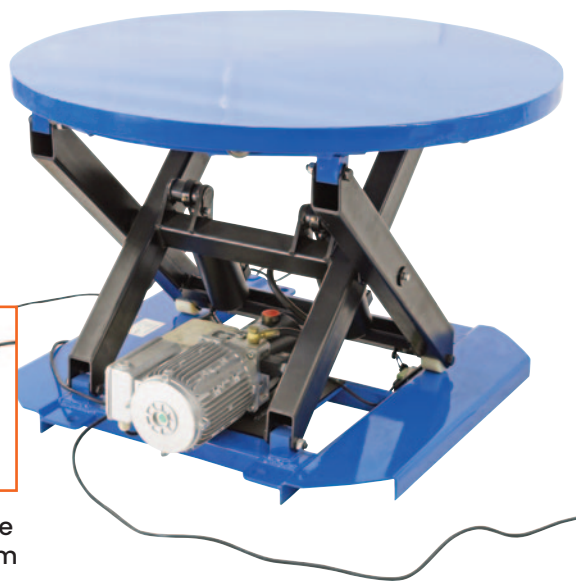

Watch a video of this in operation on our website here, www.mhaproducts.com.au/LT7050



Code	Load Capacity (kg)	Lifting Range (mm)	Table Diameter (mm)	Base Frame Size LxW (mm)	Unit Weight (kg)
LT7050	2000	300-710	1110	935x915	175

Powered Rotatable Electric Lift Table

LIFTEX

- The pallet elevator is electric up, down and rotating top via pendant control
- It is ideal for varying weight pallets as there is no need to change springs
- Powered Rotation in both directions which can be set to rotate continuously.
- Can be easily moved around factory with a forklift
- No ground fixing required
- Power: 240V



Pendant Control Unit



Watch a video of this in operation on our website here, www.mhaproducts.com.au/M2126



Code	Load Capacity (kg)	Lifting Range (mm)	Table Diameter (mm)	Base Frame Size LxW (mm)	Unit Weight (kg)
M2126	2000	340-710	1110	935x915	190

Battery Electric Work Positioner

- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height
- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing
- Automatic electric overload protection system ensures safe operation
- Quick change attachment options available
- EN1757 compliant. CE marked
- Battery electric with built in charger that you can plug in anywhere
- Load Centre: 235mm
- 24v, 7.2Ah battery
- 75mm fixed rubber castors on front
- 125mm swivel rubber castors with brakes on rear
- Leg Height: 105mm




V Block Attachment
(WP7271)



Roll Prong Attachment
(WP7272)



Double Prong Attachment
(WP7273)

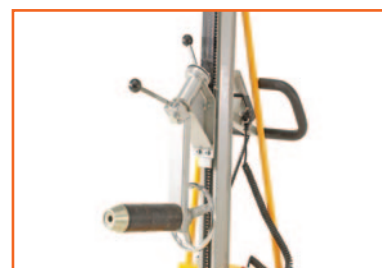

Reel Handler Rotator Attachment
(WP7274)

Code	Details	Load Capacity (kg)	Platform/ Attachment Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
WP7269	Work Positioner	100	470x660	130-1700	890x600x1990	62
WP7270	Work Positioner	150	470x660	130-1500	890x600x1790	65
WP7271	V Block Attachment – 400x400x80mm					
WP7272	Roll Prong Attachment – 600x50mm					
WP7273	Double Prong Attachment – 450x50mm (200mm between)					
WP7274	Reel Handler Rotator Attachment – 430x90mm					

Stainless Steel Battery Electric Work Positioner

- These stainless steel lifters are ideal for the food and pharmaceutical industries where hose down is required.
- Automatic electric overload protection system ensures safe operation.
- EN1757 compliant. CE marked
- Battery electric with built in charger that you can plug in anywhere
- Battery: 24V, 12.0Ah
- Power: 24V, 200W
- Compatible with attachments pictured on previous page
- Load Centre: 235mm
- 75mm fixed rubber castors on front
- 125mm swivel rubber castors with brakes on rear
- Leg Height: 115mm
- S/S Grade: 304



Pendant controller
on flexi cord



Control Unit



Quality rubber
castors with rear brakes



Built in charger

LIFTEX

Code	Load Capacity (kg)	Platform/ Attachment Size(mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
WS7200	100	470x600	130-1700	890x600x1990	63
WS7230	150	470x600	130-1500	890x600x1790	66

Battery Electric Platform Work Positioners

- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height
- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing
- Automatic electric overload protection system ensures safe operation
- Load Centre: 237mm
- Platform/ Attachment Size: 475x605mm
- Lifting/Lowering Speed: 55mm/s
- Steering Wheel: 100mm
- Battery: 12x2-10Ah
- Charger: DC-24V-2A


LIFTEX

Code	Load Capacity (kg)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
M2190	100	130-1700	920x505x2160	65
M2191	150	130-1500	920x505x1950	65



See page 176




See page 134



See page 152



See page 168



See page 132



See page 174



See page 165



See page 93



See page 224



See page 205



See page 142



See page 213



See page 179



See page 204



See page 212



See page 172



See page 8



See page 180



See page 126



See page 138



See page 128



See page 106



See page 43



See page 17

Compact Ride-On Electric Materials Handling Tug

The Liftex ride-on compact electric tug is the ultimate manual handling solution designed for goods transport for trolleys and anything that is difficult to push or pull around in the hospital, aged care and industrial warehouse environments.

The Liftex Materials Handling Electric Towing Tug is a ride-on unit that doesn't compromise its small size for a ride. Its compact size allows it to be effective in confined spaces, whilst being able to turn on its self. With a very low centre of gravity, the risk of tipping is greatly reduced. Its two front steer wheels create exceptional stability across many rough surfaces.

- Motor Voltage: 24 Volts
- Range: 30-60km



Code	Push Capacity (kg)	Pull Capacity (kg)	Overall Size LxWxH (mm)	Wheel Base (mm)	Unit Weight (kg)
LT6953	1200	1500	790x660x1340	620	115

Liftex 1000kg Smart Tow Tug

Great for moving dollies, trolleys and roll cages throughout the warehouse, workshop or shopping centres etc. Compact design which makes it extremely manoeuvrable and easy to transport in vehicles.

- Travel Speed: up to 6km/h
- Programmable speed controller
- Battery: 24v, 18Ah
- Motor: DC 24v, 300w
- Tyres: Solid - 250mm



Watch a video of this in operation on our website here,
www.mhaproducts.com.au/ST1000




LIFTEX

Code	Traction Capacity (kg)	Width (mm)	Handle Height (mm)	Unit Weight (kg)
ST1000	2000	465	650-1050	65

10 Tonne Hydraulic Jack

- Great for jacking up containers and large equipment
- Removable pump hand lever
- The housing rotates 360 degrees



LIFTEX

Code	Load Capacity (kg)	Lifting Range of Foot (mm)	Lifting Range of Head (mm)	Maximum Lever Force (kg)	Unit Weight (kg)
LS1050	10,000	30-260	420-650	40	35

Manual Fork/Platform Stacker


- Foot pump hydraulic lift
- Comes with a removable platform and has 2 adjustable fork tines under platform for lifting skids and pallets
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Size (mm)	Fork Length (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
S7250	400	125	75	660x580	650	75-1500	1040x590x1710	85

Electric Fork/Platform Stacker

- Electric hydraulic lift
- Battery: 12v 80Ah
- Comes with a removable platform and has 2 adjustable fork tines under platform for lifting skids and pallets
- Polyurethane castors - 2 x fixed, 2 x swivel with brakes

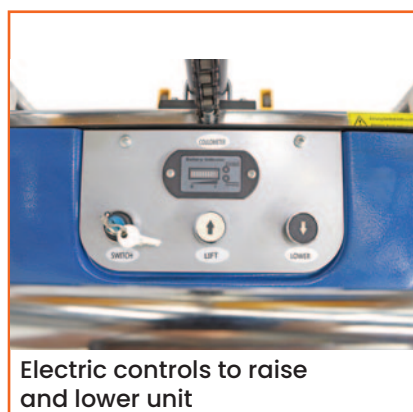

Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Size (mm)	Fork Length (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
S7251	400	125	75	660x580	650	80-1500	1040x590x1710	120

Aluminium Lift Assist Device

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods at varying heights
- Ideal for lifting items into ceiling spaces or handling machine parts at height and can be folded for storage and transport
- Manual hand winch control with automatic braking action
- Fits through standard doorways
- Quick set up - requires no tools

LIFTEX



Arm Length (mm)		Ground Clearance (mm)		Operating Length (mm)		Front Castors (mm)		Rear Castors (mm)	
800		50		1880		100		125	
Code	Load Capacity (kg)	Min. Height (mm)	Max Height (mm)	Folded Size LxWxH (mm)		Unit Weight (kg)			
AT502	350	150	5000	870x730x2000		145			

Aluminium Hand Stacker

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods up to 2500mm in height
- Manual hand winch control with automatic braking action
- Foot pedal brake
- Fits through standard doorways
- Quick set up - requires no tools
- Legs are straddle with quick adjustment



LIFTEX



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Length (mm)	Load Centre (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
AT180	180	200	50	570	254	50-2500	1100x736x1700	66

Custom Made Lifting Equipment

MHA can custom design and manufacture lifting equipment specific to your application and requirements eliminating physical strain and promoting efficiency in the workplace.

Contact us for pricing and to discuss your requirements

 **1800 750 900**



Tote Bin Lifter
& Tipper



Manual Extra Long
Platform Lifter



Electric Bin Tipper



Heavy Duty
Manual Wind
Platform Trolley



Manual Lift Trolley
With Customised
Arms



Gas Bottle
Lifter



Work Positioner
with conveyor roller
mounted to
platform



Manual Roll
Prong Trolley



120KG Fork/Platform Trolley

LIFTEX

- Robust, light weight steel construction platform lift trolley which is ideal for lifting heavy items to a work bench level for working on
- The platform is removable and has 2 fork tines which are adjustable under platform for lifting small skids



Code	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Platform Size (mm)	Fork Size (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
S7251	120	200	50	500x420	50x420	95-1050	700x460x137	39

Platform and Fork Lift Trolley

- The ideal trolley for lifting loads up to 150kg with ease
- Complies to relevant Australian Standards
- Swappable accessories for handling of different loads
- Forks for lifting small pallets and skids
- Platform for general lifting
- Patented silent winch which locks the load at any height
- Steel cable which runs inside the mast to prevent pinching
- Puncture proof rear wheels
- Made from aluminium
- Load Capacity (with forks): 150kg
- Load Capacity (with platform only): 120kg
- Platform Dimensions: 360x420mm (DxW)
- Fork Dimensions: 50x460mm (WxL)

LIFTEX


Code	Details	Lift Height (mm)	Folded Size LxWxH (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
L6990	Platform Lift Trolley	1030	300x500x1320	710x530x1320	27
L6990F	Fork Kit to suit L6990				

Heavy Duty Manual Fork Stackers

- These manual fork stackers are a very heavy duty construction and are an economical alternative to forklifts
- Manual hydraulic lift via pallet truck style handle or foot pedal
- Straddle leg model for use with standard 1170mm Australian pallets
- Standard leg model for use on Euro pallets and small skids
- Lockable rear wheels are standard on all models


LIFTEX



Handles for easy manoeuvrability



Handle pump

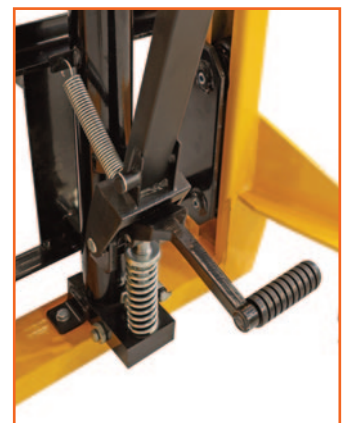

Foot pedal pump



Standard Legs



Straddle Legs

Code	Details	Load Capacity (kg)	Rear Castors (mm)	Front Castors (mm)	Lifting Range (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
S3856	Standard Leg	500	150	80	90-1600	1640x805x2000	160
S3857	Straddle Leg	500	150	80	70-1600	1600x1500x2000	225
S7256	Standard Leg	1000	150	80	90-1600	1640x1000x2085	250
S7258	Straddle Leg	1000	150	80	70-1600	1560x1450x2050	295

Pallet Turntable Disc

- The Liftex Pallet Turntable Disc is designed specifically so that pallets can be placed on or removed from the turntable using only a hand pallet truck
- Lifting lug screws into the centre of the disc and makes transportation of the unit easy.
- Disc Diameter: 1105mm



LIFTEX

Code	Load Capacity (kg)	Overall Size HxD (mm)	Unit Weight (kg)
P1065	2000	25x1235	120

Pallet Rotator Ring

- The rotator ring is popular due to its light weight and easy maneuverability.
- It can be moved easily by one person.
- 16 roller bearings to ensure smooth rolling for heavy loads



Suits Pallet
Lift Tables


LIFTEX

Code	Load Capacity (kg)	Overall Size WxH (mm)	Unit Weight (kg)
P1066	2000	1000x65	36

The Edge – Electric Pallet Truck

- The function of driving with the handle in the vertical position helps when working in confined areas and with a short body length of only 380mm makes the truck extremely compact and ideal for use in retail stores, elevators and delivery vehicles.
- The handle of the truck is supported by an air spring and the handle returns to its vertical position smoothly.
- Strong and compact structure ensures extreme durability but with an overall unit weight of only 123kg
- The Edge pallet truck comes standard with a built in security function where a pin can be set and the pallet truck can only be used once the pin is entered making it ideal for use in retail stores only giving authorised staff members use of the machine.
- Emergency stop button with a horn and reverse signals
- Electric drive and electric lifting and lowering of the pallet.
- The Edge is equipped with a maintenance-free 24V/24Ah Lithium battery with optional different capacities for various applications; with its fast charging feature the Edge works as easy as a hand pallet truck and virtually maintenance free. The battery weighs only 4.6kgs making it ideal for quick battery change over so there is no downtime with charging.

LIFTEX

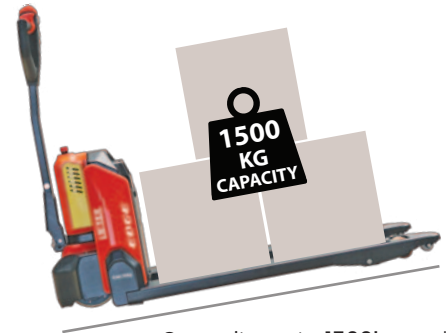

Capacity up to **1500kg** and ability to overcome ramps up to **4/16%** (loaded/unloaded) makes the truck suitable for work in loading docks and on delivery operations in different conditions

Ideal for use in delivery vehicles



Removable Lithium Battery



Pin can be set so only selected personnel can use the unit



Handle is supported by an air spring so that the handle returns smoothly to the vertical position


Code	Details	Load Capacity (kg)	Tine Size (mm)	Length of Tines (mm)	Overall Size LxW (mm)	Lowered Height (mm)	Unit Weight (kg)
SA721	The Edge	1500	60x142x1070	1185	1530x685	80	123
SA721B	The Edge Additional Battery 24V/24Ah						

2500KG Industrial Pallet Trucks

All our pallet trucks come with a maintenance free pump which are all made using high quality parts and German seal kits and are fitted with long life rollers and steering wheels.

- These safety yellow powder coated trucks are available in standard size 685mm wide, narrow pallet size 520mm and small skid size 450mm wide
- Steering Wheel Size: 50x180mm
- Rear steering wheels and fixed front castors

LIFTEX



Polyurethane wheels



Nylon wheels



PT7203NY



Watch a video of this in operation on our website here, www.mhaproducts.com.au/PT7203



PT7203

PT7202

Code	Details	Load Capacity (kg)	Tine Size (mm)	Fork Length (mm)	Width (mm)	Overall Length (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT7203	Standard Size - Poly Wheels	2500	50x160	1150	685	1550	85	70
PT7203NY	Standard Size - Nylon Wheels	2500	50x160	1150	685	1550	85	67
PT7202	Narrow Size - Poly Wheels	2500	50x160	1150	520	1550	85	60
PT8601	Small Skid Size - Poly Wheels	2500	50x160	1150	450	1550	85	66

Low Profile Pallet Truck

- Easy access into low skids and pallets.
- Great for unloading containers with low import type pallets with a low clearance of only 51mm.
- Powder coated safety yellow
- Steering Wheel Size: 50x180mm
- Comes standard with nylon wheels, however polyurethane available on request



LIFTEX



Watch a video of this in operation on our website here, www.mhaproducts.com.au/PT8619



Code	Details	Load Capacity (kg)	Tine Size HxW (mm)	Fork Length (mm)	Width (mm)	Overall Length (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT8619	Low Profile Pallet Truck	1000	47x160	1120	685	1550	51	80

Super-Low Profile Pallet Truck

- Easy access into low skids and pallets.
- Great for unloading containers with low import type pallets with a super low clearance of only 35mm.
- Powder coated safety yellow
- Steering Wheel Size: 50x160mm
- Polyurethane rear wheels and steel rollers as front wheels to achieve an extremely low clearance



Watch a video of this in operation
on our website here,
www.mhaproducts.com.au/PT8720


LIFTEX

Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT8720	Super Low Profile Pallet Truck	1000	30x160	1120	520	35	100

Extra Long 2000KG Pallet Trucks

- These extra long pallet trucks are extremely useful for extra deep pallets
- Available in 1800 and 2500mm long as standard however other sizes are available on request
- The PT9067 Picks up two pallets in one lift.
- Steering Wheel Size: 50x200mm
- Powder coated safety yellow
- Polyurethane wheels



Watch a video of this in operation
on our website here,
www.mhaproducts.com.au/PT9067


LIFTEX

Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT9067	Extra Long Pallet Truck	2000	60x160	1800	520	85	100
PT9065	Extra Long Pallet Truck	2000	60x160	1800	685	85	110
PT9066	Extra Long Pallet Truck	2000	60x160	2500	685	85	285

Galvanised Pallet Trucks

- These galvanised pallet trucks are available in both standard size 680mm wide and Euro pallet size 520mm
- Ideal for the food, chemical and pharmaceutical industry or outdoor use
- Steering Wheel Size: 50x200mm
- Nylon wheels


LIFTEX

Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT7211	Euro Size	2000	60x160	1150	520	85	65
PT7210	Standard Size	2000	60x160	1120	685	85	67

Stainless Steel Pallet Trucks

- These Stainless steel pallet trucks are available in both standard size 680mm wide and Euro pallet size 520mm
- Ideal for the food, chemical and pharmaceutical industry or where corrosive acids are used
- Front wheels are fully enclosed which is a required for clean rooms and food environments
- Nylon Wheels
- Steering Wheel Size: 50x200mm
- Nylon wheels


LIFTEX

Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
PT7215	Euro Size	2000	60x160	1150	520	85	75
PT7215	Standard Size	2000	60x160	1150	685	85	77

2000KG Pallet Truck With Load Scales

- Our scale pallet trucks are extremely reliable and highly accurate in measuring your pallet weight.
- This fork truck has a totalising function which adds up multiple pallet weights giving the total weight per shipment or order.
- The weighing unit uses four AA batteries which give approx 4200 weighting actions
- The unit gives a low battery warning and shuts off after 3 minutes
- The digital display can be read from any angle in ambient light conditions
- Optional scale printer unit available on request
- Scale Increments: 1kg
- Scale Functions: Zero correction, gross/net weight, total weight
- Nylon Wheels



LIFTEX

Code	Load Capacity (kg)	Steering Wheel Size (mm)	Tine Size (mm)	Fork Length (mm)	Width (mm)	Min. Fork Height (mm)	Overall Size LxW (mm)	Unit Weight (kg)
T7221	2000	50x180	50x182	1150	690	76	1650x690	113

Stainless Steel 2000KG Pallet Truck With Load Scales

- These stainless steel pallet trucks are ideal for applications in the food and medical industries or areas where corrosive acids are used.
- Fully stainless steel - 316 grade
- Scale Increments: 2kg
- Scale Functions: Zero correction, gross/net weight, total weight
- Steering Wheel Size: 50x180mm
- Nylon Wheels



LIFTEX

Code	Details	Load Capacity (kg)	Tine Size (mm)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Unit Weight (kg)
T7226	Standard Size	2000	50x182	1150	690	85	138

5 Tonne Pallet Truck

- These extra heavy duty pallet trucks can be used to move heavy machinery and come with a towing hook for pulling if required
- Steering Wheel Size: 50x200mm
- Powder coated safety yellow
- Steel roller wheel



Heavy duty steel rollers



LIFTEX

Code	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Unit Weight (kg)
PT7205	5000	1150	680	90	200	198

Rough Terrain Pallet Truck

This rough terrain pallet truck is great for applications such as timber yards, brick yards and hard stand areas where the ground is gravel or rough.

- Large pneumatic wheels
- Adjustable Fork Width: 228-735mm
- Width Inside Front Wheels: 1230mm
- Front Wheel Size: 550x132mm (Dia x Width)
- Rear Wheel Size: 265x80mm (Dia x Width)
- Turning Radius: 1500mm
- Axle Distance Between Front and Rear Wheels: 973mm



LIFTEX

Code	Load Capacity (kg)	Load Centre (mm)	Tine Size (mm)	Fork Length (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
T7420	1200	450	100x50	860	63	233	1375x1605x1200	245

1000KG Hi-Lift Pallet Trucks (Manual)

- Great for lifting skids and pallets with no bottom rail
- Extremely easy to pump and light weight
- Quick-lift as standard with automatic transfer to normal lifting loads over 150kg
- Automatic descending speed control, regardless of load
- Front support legs and adjustable stabilisers ensure maximum stability
- Heavy duty design
- Conforms to EN 1757-4
- Not suitable for closed pallets with a bottom rail



LIFTEX

Code	Details	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Tine Size (mm)	Lifting Range (mm)	Unit Weight (kg)
PT7230	Manual	1000	1100	520	85	800	50x160	85-800	118
PT7231	Manual	1000	1150	680	85	800	50x160	85-800	125

1000KG Hi-Lift Pallet Trucks (Electric)

- Great for lifting skids and pallets with no bottom rail
- Quick-lift as standard with automatic transfer to normal lifting loads over 150kg
- Automatic descending speed control, regardless of load
- Front support legs and adjustable stabilisers ensure maximum stability
- Heavy duty design
- Conforms to EN 1757-4
- Not suitable for closed pallets with a bottom rail
- Battery: 12v, 54Ah



LIFTEX

Code	Details	Load Capacity (kg)	Length (mm)	Width (mm)	Min. Fork Height (mm)	Max. Fork Height (mm)	Tine Size (mm)	Lifting Range (mm)	Unit Weight (kg)
PT9332	Electric	1500	1100	520	85	800	50x160	85-800	150
PT9333	Electric	1500	1150	680	85	800	50x160	85-800	160

Fork Extension Slippers / Tines (Powder Coated)

LIFTEX

- Fork slippers extend the versatility of your lift truck
- The safe working load (SWL) is measured per pair at 600mm load centre
- These slippers are for general usage and are required to not exceed the forklift tine length by more than 50% (eg, a fork tine of 1050mm long can only use the F2933 slippers)



Fork slipper hooks around the back of the fork tines to keep secure during use




Code	*SWL (kg)	Length (mm)	Internal Tine Size (mm)	External Tine Size (mm)	HCG (mm)	Weight Per Pair (kg)
F2933	*2700	1524	140x50	155x60	685	49
F2932	*2700	1830	140x50	155x60	825	55
F2931	*2700	2435	140x50	155x60	1095	79

*SWL shown here is the maximum however it varies depending on forklift capacity - Refer to load chart provided on fork slippers and forklift capacity

Fork Extension Slippers / Tines (Galvanised)

- Fork slippers extend the versatility of your lift truck
- The safe working load (SWL) is measured per pair at 600mm load centre
- Slippers conform to relevant Australian Standards
- Designed and manufactured in accordance with AS2359.15 and other relevant Australian standard which requires the slippers used for general usage to be not longer than 167% of the supporting tine's length.

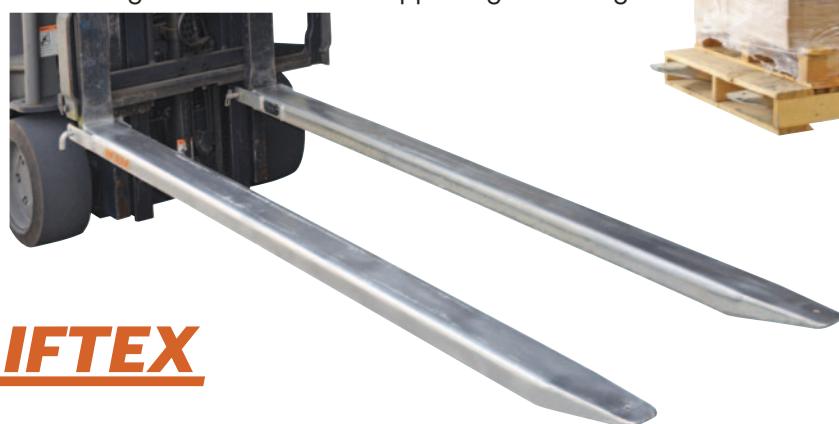

Supplied with tine pins to secure slippers to forklift

LIFTEX

Code	*SWL (kg)	Length (mm)	Internal Tine Size (mm)	External Tine Size (mm)	HCG (mm)	Weight Per Pair (kg)
F2936	*4500	1780	138x55	150x67	845	66
F2937	*4500	2400	138x55	150x67	1130	88
F2938	*8000	1800	170x76	185x92	830	133
F2939	*8000	2400	170x76	185x92	1135	177
F2940	*8000	3000	170x76	185x92	1435	221

*SWL shown here is the maximum however it varies depending on forklift capacity - Refer to load capacity plate on your forklift

Slip-On Roll Forklift Prong

Slip-on Roll Prong suitable for fabric, cable and coil products. Can also be used for carpet handling, but usage is generally restricted to larger forklifts due to the extended load centre created by the length of the tines.

These attachments quickly adapt to almost any forklift and require only the connection of a safety chain to prevent unintentional disengagement.

- Prongs are manufactured from solid steel
- Finish: Zinc Plated
- The safe working load (SWL) is measured at 1400mm load centre



LIFTEX

Code	SWL (kg)	Prong Diameter (mm)	Length (mm)	Fork Pocket Size (mm)	Fork Centres (mm)	HCG (mm)	Unit Weight (kg)
F2992	510	70	2800	190x65	345	845	163

Crane / Forklift Spreader Beam


The Spreader Beam is a unique multitasking Beam which can be used by Crane or Forklift to lift long loads.

Using a Crane, loads can be lifted via the centre single hook point (as a 'Lifting Beam'), or end lifted using a 2 leg Chain Sling (as a 'Spreader Beam').

If lifting by forklift, the 600mm long slipper pockets allow for fast and safe connection to the truck.

The Spreader Beam load connection points are adjustable to 3 positions by moving the extendable arms each end. Both extendable arms are locked into position via safety pins. The unit is supplied standard with a safety swivel hook each end.

The extendable arms are zinc plated with the main body painted in 'safety orange'.

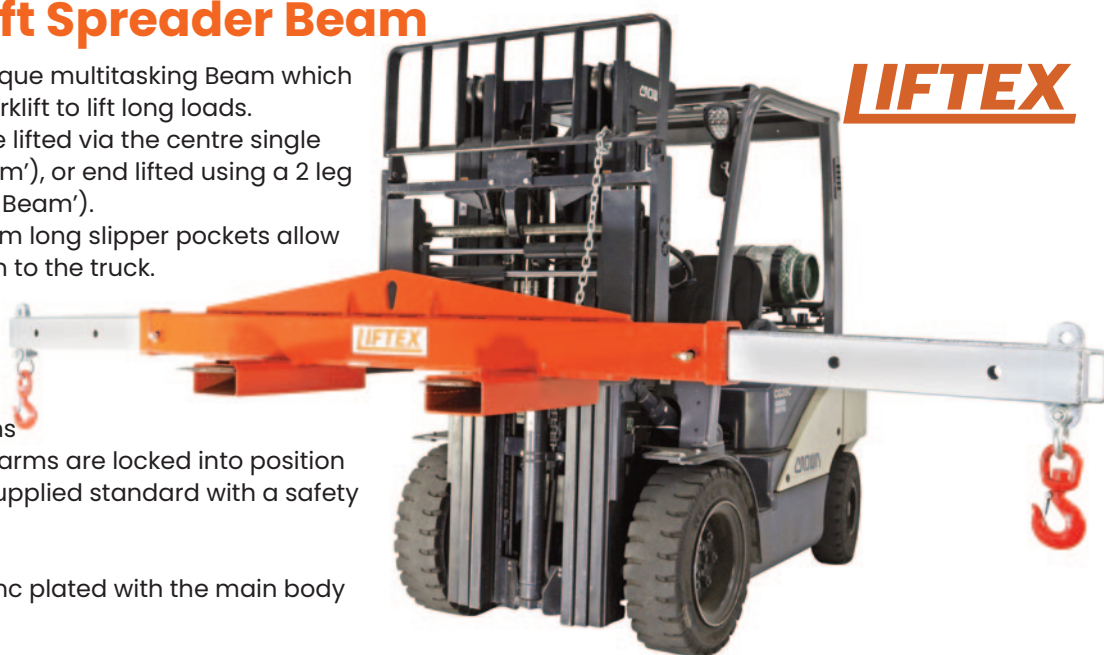

LIFTEX

Rated Capacity When used as	Fully Retracted (LC @ 2405mm)	Middle Position (LC @ 3165mm)	Fully Extended (LC @ 3925 mm)
Forklift Attachment	3500kg	1500kg	750kg
Lifting Beam	4500kg	2500kg	1300kg
Spreader Beam	9000kg	7200kg	5600kg

Code	F/Lift HCG (mm)	Fork Pocket Size (mm)	Fork Centres (mm)	Unit Weight (kg)
FL2439	300	190x65	900	172


2200KG Standard Pallet Hook

The PH2906 Pallet Hook features variable body height and adjustable tine width, making this versatile attachment ideal for the transport and construction industry.

Load balancing is via the moveable lifting ring.

The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Adjustable Clearance is the distance between tines and head
- Finish: Zinc plated

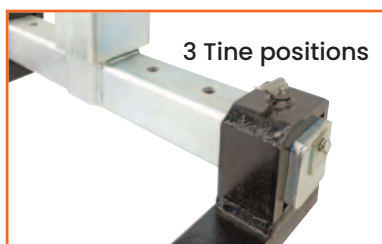
LIFTEX

Code	SWL (kg)	Load Centre (mm)	Tine Size (mm)	Adjustable Clearance (mm)	Unit Weight (kg)
PH2906	2200	600	100x45x1055	1005-1605	215

LIFTEX

4500KG Heavy Duty Pallet Hook

A heavy duty 4.5 tonne capacity pallet hook for loads up to 4500kg. Fully adjustable tines makes this unit extremely versatile. Load balancing is carried out by positioning the lifting ring to suit the Centre of Gravity of the load.

Load balancing is via the moveable lifting ring.

The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Clearance is the distance between tines and head
- Finish: Enamel painted



Code	SWL (kg)	Load Centre (mm)	Tine Size (mm)	Clearance Between Tines and Head (mm)	Unit Weight (kg)
PH2915	4500	600	125x50x1070	1405	456


2000KG Automatic Pallet Hook

The automatic pallet hook, type PH2908, is self-levelling for ease of operation. An internal spring mechanism ensures the lifting eye is in the correct position to keep the tines horizontal, eliminating the need to reposition the lifting ring.

Enclosed frame members protect the operator from moving parts.

The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Clearance is the minimum distance between tines and head
- Finish: Zinc plated

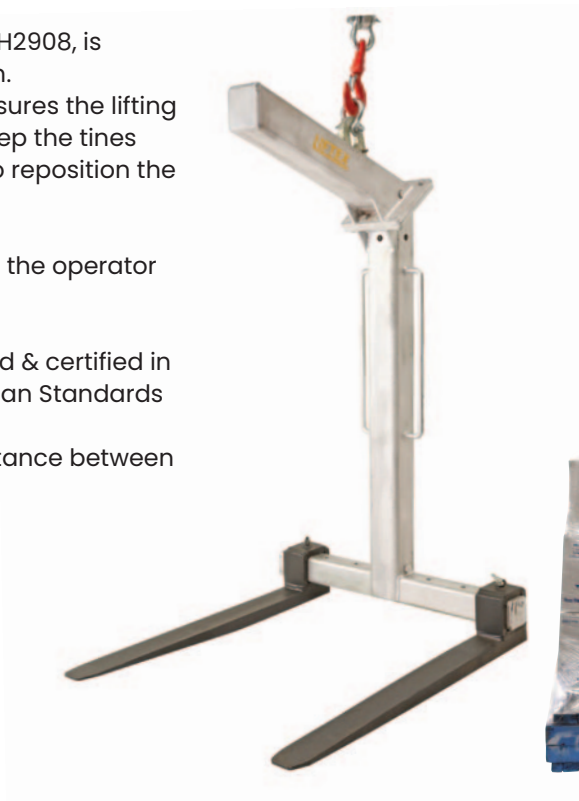

Code	SWL (kg)	Load Centre (mm)	Adjustable Tine Size (mm)	Clearance (mm)	Unit Weight (kg)
PH2908	2000	600	100x45x1055	1355	196



Needing a forklift safety cage?
See Page 118

4.5 Tonne Fixed Short Jib

- This 4500kg short fixed jib is designed as an affordable general purpose jib which is great for confined spaces and has a 1.9 metre reach when fully extended.
- Finish: Zinc plated
- 4 jib positions
- Overall Dimensions (closed): 1270x490x250mm (LxWxH)

SAFE WORKING LOADS (SWL) PER POSITION

POSITION	1	2	3	4
EXTENSION (mm)	670	1165	1545	1925
SWL (kg)	4500	2900	1300	750



LIFTEX

Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
JS4500	4500	1250	1900	185x65	290	95

4.5 Tonne Fixed Long Jib

LIFTEX

- This 4500kg long jib is a general purpose jib which is great for reaching across pits and areas where the forklift can't drive up to as it has a 3.5 metre reach when fully extended.
- Safe Working Load: 4500kg
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions (closed): 2040x490x250mm (LxWxH)



SAFE WORKING LOADS (SWL) PER POSITION


POSITION	1	2	3	4	5	6
EXTENSION (mm)	870	1945	2325	2705	3085	3465
SWL (kg)	4500	1300	750	560	380	200

Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
JL4500	4500	2000	3500	185x65	290	140

2.0 Tonne Hook & Tow Jib Attachment

This 2000kg hook & tow jib is suitable for most forklifts and is a simple slip-on attachment with safety chain and swivel hook as pictured.

- Safe Working Load: 2000kg at 1160mm load centre
- Finish: Zinc plated
- Maximum weight on towball must not exceed 500kg
- Hook jib has 2 lifting positions
- Overall Dimensions: 1410x420x140mm (LxWxH)

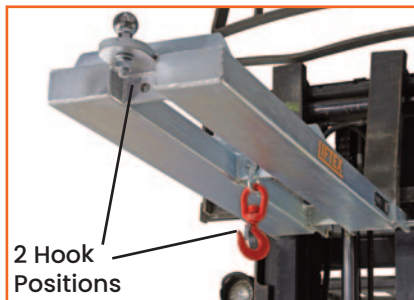

Code	SWL (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Fork Pocket Length (mm)	Unit Weight (kg)
HJ2005	2000	140x65	250	1220	45

4.5 Tonne Long Tilting Jib

This 4500kg long tilting jib is the most versatile jib in our range and allows for additional height of up to 2.23 metres.

- SWL chart is show in table
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions (closed): 2100x520x650mm (LxWxH)

LIFTEX

SAFE WORKING LOADS (SWL) PER POSITION

POSITION	1	2	3	4	5	6
EXTENSION (mm)	770	2010	2390	2770	3150	3530
SWL (kg)	4500	1100	630	470	300	150




Code	SWL (kg)	Jib Length When Closed (mm)	Jib Length When Extended (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
TJ4500	4500	2100	3530	185x65	322	190

Expanding Skate Conveyors

- Self tracking flexible expanding conveyor which expands from 1100mm to 4000mm
- Multiple units can be joined to make 1 continuous conveyor system
- Excellent for truck and container unloading and for assembly lines
- Easy and quick setup with adjustable height legs and brake castors on every leg
- Reduces manual handling
- Bolted steel construction with skate wheels



Skate Wheel

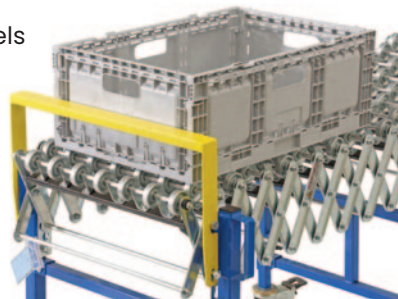
troden
conveyors

Code	Width (mm)	Load Capacity Per Metre (kg)	Castors (mm)	Length Retracted (mm)	Length Expanded (mm)	Height Range (mm)	Unit Weight (kg)
40125	460	100	125	1100	4000	690-1000	112
40129	610	100	125	1100	4000	690-1000	124
40130	760	100	125	1100	4000	690-1000	142

Expanding Roller Conveyors

- The flexible expanding roller conveyor expands from 1500mm to 4000mm
- Multiple units can be joined to make 1 continuous conveyor system
- The roller conveyor is good for odd shaped cartons and bags of goods where the skate wheel conveyor wont work
- Easy and quick setup with height adjustable legs and brake castors on every leg
- Reduces manual handling
- Bolted steel construction with steel rollers



Steel Rollers



troden
conveyors

Code	Width (mm)	Load Capacity Per Metre (kg)	Castors (mm)	Length Retracted (mm)	Length Expanded (mm)	Height Range (mm)	Unit Weight (kg)
40123	460	130	125	1500	4000	690-1000	96
40124	610	130	125	1500	4000	690-1000	116
40128	760	130	125	1500	4000	690-1000	126

Expanding Nylon Skate Conveyor



- Self tracking flexible conveyor which can expand from 1100mm to 4000mm
- Multiple units can be joined to make 1 continuous conveyor system
- Excellent for truck and container unloading and for assembly lines
- Easy and quick setup with adjustable height legs and brake castors on every leg
- Reduces manual handling
- Bolted steel construction with nylon skate wheels

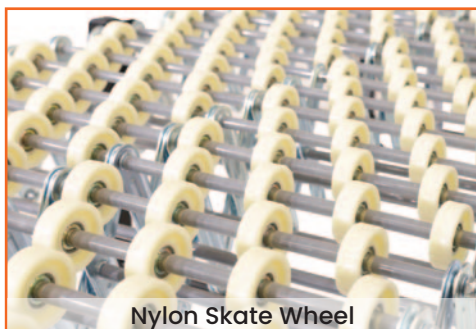

Nylon Skate Wheel



Code	Width (mm)	Load Capacity Per Metre (kg)	Castors (mm)	Length Retracted (mm)	Length Expanded (mm)	Height Range (mm)	Unit Weight (kg)
40129N	610	75	105	1100	4000	690-1000	90

Electric Expanding Roller Conveyors



- Simply plug in and go, this powered electric roller conveyor is great for carrying boxes and items up hill where gravity may not be achievable
- This conveyor is flexible and expands from 1500mm to 4000mm
- Multiple units can be joined to make 1 continuous powered conveyor system
- Great for loading and unloading containers
- Easy and quick setup with adjustable height legs and brake castors on every leg
- Quiet operation 240V AC motor with forward and reverse action and adjustable roller speed



Code	Width (mm)	Load Capacity Per Metre (kg)	Castors (mm)	Length Retracted (mm)	Length Expanded (mm)	Height Range (mm)	Unit Weight (kg)
40143	460	140	125	1500	4000	690-1000	126
40144	610	140	125	1500	4000	690-1000	131
40145	760	140	125	1500	4000	690-1000	172

Roller Conveyor System – Build Your Own System

MHA's full range of gravity conveyors provides the simple solution for moving all types of products in industries such as transport, distribution centres, container unloading & similar.

Roller conveyors are one of the most common types of conveyors applied in conveying flat bottom type products such as cases, boxes, pallets & trays. These kind of conveyors improve efficiency distribution & line links between different stages of production of your product.


Choose roller type.
Choose roller length.
Choose number of rollers.

Step One.



Choose the matching frame width. Choose the length of frame.

Step Two.

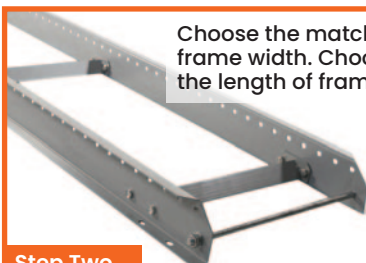

Choose the matching stands to suit frame.

Step Three.



50mm Rollers to suit straight frames – Poly Rollers

Code	Description	Width (mm)	Capacity (kg)
CP7401	Poly Roller	300	50
CP7402	Poly Roller	450	50
CP7403	Poly Roller	600	50



50mm Rollers to suit straight frames – Steel Rollers

Code	Description	Width (mm)	Capacity (kg)
CP7404	Zinc Steel Roller	300	110
CP7405	Zinc Steel Roller	450	110
CP7406	Zinc Steel Roller	600	110



50mm Rollers to suit curved frames – Poly Rollers

Code	Description	Width (mm)	Capacity (kg)
CP7407	Poly Roller	300	50
CP7408	Poly Roller	450	50
CP7409	Poly Roller	600	50



50mm Rollers to suit curved frames – Steel Rollers

Code	Description	Width (mm)	Capacity (kg)
CP7410	Zinc Steel Roller	300	110
CP7411	Zinc Steel Roller	450	110
CP7412	Zinc Steel Roller	600	110

Code	Description	Frame Width (mm)	Frame Length (mm)	Max Rollers
CP7413	Conveyor Frame	300	1500	20 per length
CP7414	Conveyor Frame	300	3000	40 per length
CP7415	Conveyor Frame	450	1500	20 per length
CP7416	Conveyor Frame	450	3000	40 per length
CP7417	Conveyor Frame	600	1500	20 per length
CP7418	Conveyor Frame	600	3000	40 per length



Roller Conveyor System – Build Your Own System

Conveyor Stand – Mild Steel Powdercoated

Code	Description	Frame Width (mm)	Height Adjustable (mm)
CP7422	Conveyor Stand	300	715-1050
CP7423	Conveyor Stand	450	715-1050
CP7424	Conveyor Stand	600	715-1050



Skate Wheel



Gravity roller conveyor in bike warehouse



Gravity conveyor apple and fruit sorting warehouse



Curved Conveyor Frame
– Mild Steel Powdercoated (90 degree bend)



Gravity conveyor in distribution warehouse

Code	Description	Frame Width (mm)	Outside Radius (mm)	Min Pitch (mm)	Max Rollers
CP7419	Conveyor Frame	300	1200	75-90	22 per length
CP7420	Conveyor Frame	450	1200	65-95	22 per length
CP7421	Conveyor Frame	600	1500	65-105	22 per length

Deluxe Drum Cradle

- Heavy duty drum cradle with retractable handles for use on 210 litre steel drums
- Great for moving drums around the site and to lay drums into the side position.
- Durable zinc plated finish
- Single person operation
- Wheel Type: Nylon


LIFTEX

Code	Load Capacity (kg)	Length (mm)	Width (mm)	Horizontal Height (mm)	Unit Weight (kg)
DL2690	300	1000	370	450	14.5

Steel Drum Palletiser

- Loads and unloads drums to and from the corner of a pallet
- Suit steel drums with rim tops
- Locking handle holds weight of drum for easy transport
- Wheel Type: Polyurethane


LIFTEX

Code	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7274	365	800x1220x1160	85



WB240G

See page 212



R2908

See page 126



M1063

See page 28

Steel Drum Carrier / Rotator

- Remarkably versatile 210 litre Drum Carrier/Rotator Raises, transports, rotates, tilts and drains fully loaded drums
- Lockable in horizontal or vertical position
- Can be turned end over end to agitate contents
- 200mm roller bearing castors and 100mm swivel castor



LIFTEX

Code	Load Capacity (kg)	Length (mm)	Height (mm)	Width (mm)	Clearance under drum while horizontal (mm)	Unit Weight (kg)
DL7270	370	1250	1180	800	370	42

Plastic Drum Carrier / Rotator

- Remarkably versatile 210 litre Drum Carrier/Rotator Raises, transports, rotates, tilts and drains fully loaded plastic drums
- Lockable in horizontal or vertical position
- Can be turned end over end to agitate contents
- 200mm roller bearing castors and 100mm swivel castor



LIFTEX

Code	Load Capacity (kg)	Length (mm)	Height (mm)	Width (mm)	Clearance under drum while horizontal (mm)	Unit Weight (kg)
DL7271	370	1250	1180	800	370	47

Steel & Plastic Drum Trolley

- This drum trolley suits both steel and plastic 210 litre drums
- Suits plastic drums with a top lip
- Hydraulic handle pump which provides smooth easy lifting



Code	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7272	250	820x800x1050	42

Steel & Plastic Drum Trolley

- These drum trolleys are ideal for transporting both steel and plastic drums and are available in solid wheel and pneumatic wheels for rough and uneven ground
- This trolley is also self-standing which means the operator can leave without drums falling over
- Wheels: 400mm front, 75mm castors on the rear



Code	Details	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7275	Steel/Plastic Drum Trolley (Solid Wheel)	450	1050x700x750	24
DL7278	Steel/Plastic Drum Trolley (Pneumatic Wheel)	450	1050x700x750	28

Steel & Plastic Drum Lifter/Palletiser

- This drum trolley suits both steel and plastic 210 litre drums.
- Loads and unloads drums from the corner of a pallet and can also be used to lift and carry drums around the warehouse or yard.
- Spring loaded clamp grabs the drum rib with no manual input
- The lifter has a brake to avoid rolling on sloped areas
- Internal size of adjustable legs: 660-1380mm

LIFTEX


Spring loaded auto drum clamp



Code	Load Capacity (kg)	Lifting Height (mm)	Length (mm)	Height (mm)	Width (mm)	Unit Weight (kg)
DL7276	400	1070	1120	1850	900-1550	100

Drum Palletiser Stackers

- These drum palletisers stackers are great for loading and unloading both plastic and steel drums onto pallets
- Can also be used to stack drums on top of another drum or to place on a truck or ute
- DL6967 comes with a battery operated weighing scale which gives you an accurate measurement of the drums weight


LIFTEX


Code	Details	Load Capacity (kg)	Max Lift Height (mm)	Leg Length (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL6966	Drum Palletiser Stacker	450	1100	500	1140x950x1870	130
DL6967	Drum Palletiser Stacker (with load scales)	450	1100	500	1150x950x1870	135

Hydraulic Drum Truck

- Easily transport steel drums with this drum truck
- Pallet truck style design
- Nylon wheels


LIFTEX

Code	Load Capacity (kg)	Min Arm Height (mm)	Max Arm Height (mm)	Radius of Arm (mm)	Overall Size LxW (mm)	Unit Weight (kg)
DL7430	365	270	390	270	1022x722	53

Low Profile Drum Trolley


- This drum trolley has a built in handle which is used for tilting the drum back to push the trolley under.
- Handle has built in bung remover and seal remover
- Wheel Size: 150x50mm (front), 75x32mm (rear)


LIFTEX

Code	Load Capacity (kg)	Radius of Arm (mm)	Radius of Arm (mm)	Overall Size HxDxW (mm)	Unit Weight (kg)
DL7630	500	270	270	950x570x750	17

Drum Dollies

- Drum dollies are suitable for both steel and plastic drums and containers
- Powder coated and stainless steel options
- Heavy duty easy wheel castors
- 3 versions available

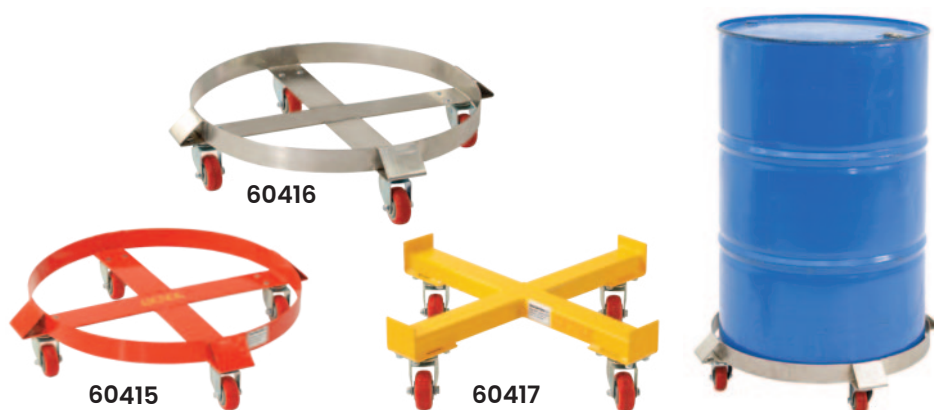

LIFTEX

Code	Details	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
60415	Drum Dolly (Powder coated)	300	610x710x150	7.5
60416	Drum Dolly (Stainless Steel)	300	610x710x150	7.5
60417	Heavy Duty Drum Dolly (Powder coated)	500	630x630x150	9

Drum Tongs

- For lifting steel drums with an overhead crane or the fork tine hook
- To operate, set locking lever in locked open position
- Hooks automatically engage when lifted and disengage when the drum is put down


Code	Load Capacity (kg)	Jaw Opening Distance (mm)	Unit Weight (kg)
DL7610	500	910	8

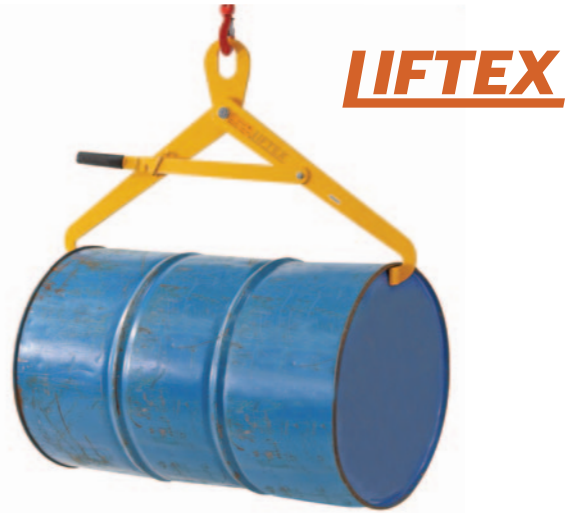

2.5 Tonne Forklift Tine Hook

- Converts forklift into a mobile crane in seconds
- Adjustable mounting position along the length of the fork
- Secured to forks by thumb screw
- Swivel hook includes safety latch

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Unit Weight (kg)
DL7200	2500	60x150	25

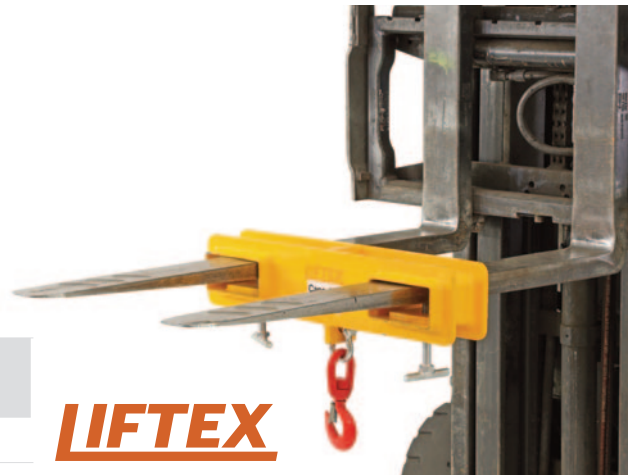

Hook Drum Lifter

- Suitable for both steel and plastic 210 litre drums
- Works on almost any drum that has a rim to grab onto
- Ideal for picking up a drum in the middle of a cluster without having to move any that are in front

Code	Load Capacity (kg)	Overall Size HxWxD (mm)	Unit Weight (kg)
DL7253	500	215x711x711	13

Drum Sling Lifter

- This sling lifter is ideal for lifting drums and cylinders using an overhead crane or forklift lifting hook device
- Suits up to 210 litre drums
- Supplied with metal head ring

Code	Details	Load Capacity (kg)	Sling Length (mm)	Unit Weight (kg)
DL7257	Drum Sling Lifter	500	1100	3
DL7258	Drum Sling Lifter	1000	1100	4



Geared Drum Lifter & Turner

- Allows the operator to lift up the drums and rotate to decant via the manual pull chains
- Can be lifted using a gantry or overhead crane or with our fork tine hook
- 3 metre control chain
- 360 degree rotatable
- Suitable for both steel and plastic drums


LIFTEX

Code	Load Capacity (kg)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7636	380	1000x720x200	38

Forklift Geared Drum Rotator

- Converts your forklift into a drum handler
- Suitable for 210 litre steel and plastic drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- Finish: Painted safety yellow
- 360 degree rotatable


LIFTEX

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Drum Size (mm)	Unit Weight (kg)
DL7261	300	150x55	825	570-600	60



Forklift Drum Rotator

- Converts your forklift into a drum handler
- Suitable for 210 litre steel drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- 3 metre pull chain from operators seat
- 30:1 gearing ratio
- Finish: Painted safety yellow


LIFTEX

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Drum Size dia. (mm)	Unit Weight (kg)
DL7260	380	180x65	570-600	97

Galvanised Forklift Drum Grab

- Attaches quickly and easily to most fork trucks
- Heavy duty welded steel construction
- Lifts, transports and deposits steel drums without having to leave the drivers seat
- Finish: Galvanised



LIFTEX

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
DL2950	500	165x65	325	78



Forklift Drum Grab

- Attaches quickly and easily to most fork trucks
- Heavy duty welded steel construction
- Lifts, transports and deposits steel drums without having to leave the drivers seat
- Finish: Painted safety yellow

LIFTEX

Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
DL7262	680	177x58	330	56



See page 193



See page 125



See page 213



See page 199



See page 155



See page 190



See page 60



See page 145



Parrot Beak Drum Lifters

- Suitable for both steel and plastic 210 litre drums
- Simple auto clamp operation - no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Height adjustable for use with different drum shapes
- Available in single and double drum pickups
- Finish: Painted safety yellow

LIFTEX

DL7250



DL7251

Code	Details	Load Capacity per beak (kg)	Fork Pocket Size LxWxH (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
DL7250	Parrot Beak Drum Lifter (single)	360	750x150x55	500	45
DL7251	Parrot Beak Drum Lifter (double)	360	750x150x55	590	62

Galvanised Parrot Beak Drum Lifter

- Suitable for both steel and plastic 210 litre drums with a top lip
- Simple auto clamp operation - no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Finish: Zinc plated


LIFTEX


Code	Load Capacity (kg)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Unit Weight (kg)
DL2940	1000	185x60	250	72

Drum Positioner

- Suitable for both steel and plastic 210 litre drums
- Can change drum position from vertical to horizontal and vice-versa
- Hinged tines automatically lock when lowered to the ground in horizontal position
- Suitable for loading drums onto transport vehicles
- Works great for loading and unloading drums off rack stands
- Can be operated without the driver having to leave the forklift seat

LIFTEX



Code	Load Capacity (kg)	Prong Distance Apart (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL2935	400	575	150x60	420	1800x700x660	75

Fixed Prong Drum Positioner

- Suitable for both steel and plastic 210 litre drums
- Works great for loading and unloading drums off rack stands

LIFTEX



Code	Load Capacity (kg)	Prong Distance Apart (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL2936	300	565	140x50	560	1360x715x120	42

Drum Tipper / Dumper

LIFTEX

- Fast and efficient solution to emptying 205 litre steel drums, ideally suited to waste and scrap products
- The drum is secured with the sturdy belly strap and locked in place with the over-centre catch and locking pin
- A rope draw chord is pulled from the driver's seat to dump the drum where required. A custom locking mechanism is fitted to prevent accidental release while driving over bumpy ground
- Rotational ability 180 degrees



Code	Working Load Limit (kg)	Load Centre (mm)	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7215	500	1000	185x65	840	1400x1040x600	85

Side Shift Drum Palletiser

- The Side Shift Drum Palletiser is specially designed for moving drums and barrels from any position on a pallet.
- It uses a sliding side-shift arrangement allowing it to even be used for moving containers and drums placed in the centre of a pallet.
- The palletiser straddles the pallet and only requires access to one side, thus allowing pallets in confined areas to be kept against the wall even when unloading.
- When moving the drum onto another pallet, scales or the floor, the drum can also be moved to either side using the side-shift arrangement
- This unique design side shift drum palletiser can pickup drums from any position on the pallet, skid or bund -straddles beside and over the pallet
- Suitable for both steel and plastic drums
- The operator requires only 12kg of force on the handle to lift a 300kg drum



Spring loaded clamp to securely hold the drum



Handle lever to lower drum



Foot pedal to raise drum



LIFTEX

Code	Load Capacity (kg)	Ground / Pallet Clearance (mm)	Max Lift Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL6974	350	350	575	920x1550x1520	168

Fully Electric Drum Stacker & Rotator

LIFTEX

- Stand on or walk behind battery electric operation
- Suitable for 210 litre steel drums
- Will work with some plastic drums depending on size and shape
- Lifts, transports and rotates
- Max Slope Ability: 3% loaded 5% unloaded
- Wheel Size: 125x50mm
- Power: 24V, 210Ah
- Electromagnetic brake



Watch a video of this in operation on our website here,
www.mhaproducts.com.au/DL7280



Code	Load Capacity (kg)	Max Lift Height (mm)	Drum Rotating Range (deg.)	Turning Radius (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7280	420	2400	135	2150	2270x1170x1860	1100

Steel & Plastic Drum Lifter & Rotator

- This drum lifter can pickup and rotate drums with ease
- Manual foot or handle hydraulic pump for lifting
- Worm drive handle for drum tilting


LIFTEX

Code	Load Capacity (kg)	Lifting Height (mm)	Leg Length (mm)	Distance between inner legs (mm)	Distance between outer legs (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7203	450	1500	770	630	810	1400x1000x2100	190

Electric Drum Lifter & Rotators

These electric drum lifters pickup, rotate and weigh drums using battery electric power for both up and down and for tilting.

- Suitable for both steel and plastic drums
- Drum weighing scale version available
- Lifting Speed: 120mm per second
- Rotation Speed: 180° - 30 seconds
- Max Lift Height: 2300mm
- Distance Between Straddle Legs: 630mm
- Leg Length: 740mm
- Battery: 12v, 120Ah



DL7206



DL7207



Load Scale Unit

Code	Details	Load Capacity (kg)	Max Lift Height (mm)	Overall Size LxWxH (mm)	Unit Weight (kg)
DL7206	Electric Drum Lifter/Rotator	450	2300	1600x950x1920	355
DL7207	Electric Drum Lifter/Rotator (with scale)	450	2300	1600x950x1920	355

