



Type 2047 Liftex Auto Levelling Trolley


User Manual

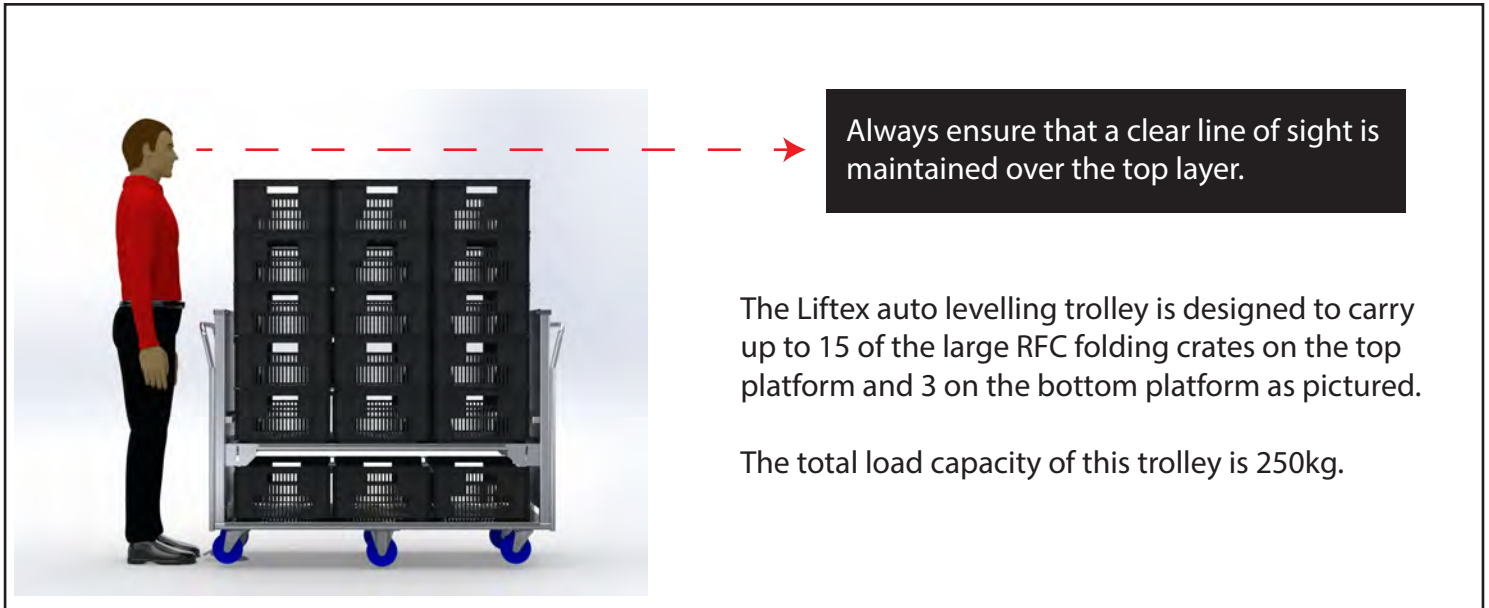


Load the top platform evenly distributed as shown in the below diagrams

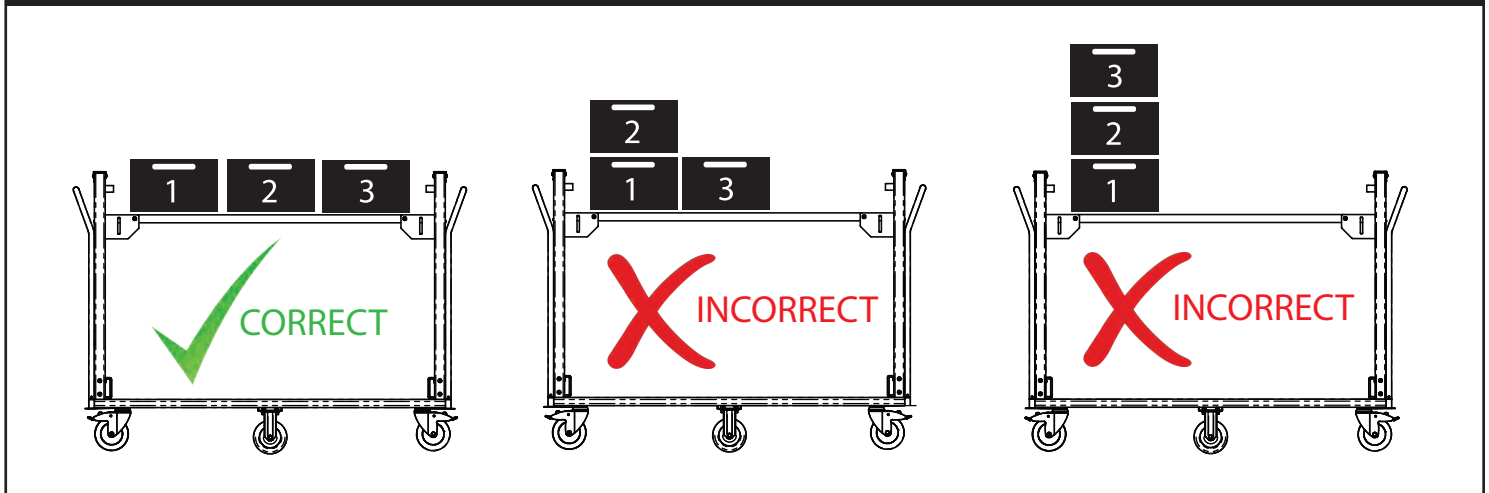


As loading begins the platform will automatically lower and raise as its loaded/unloaded

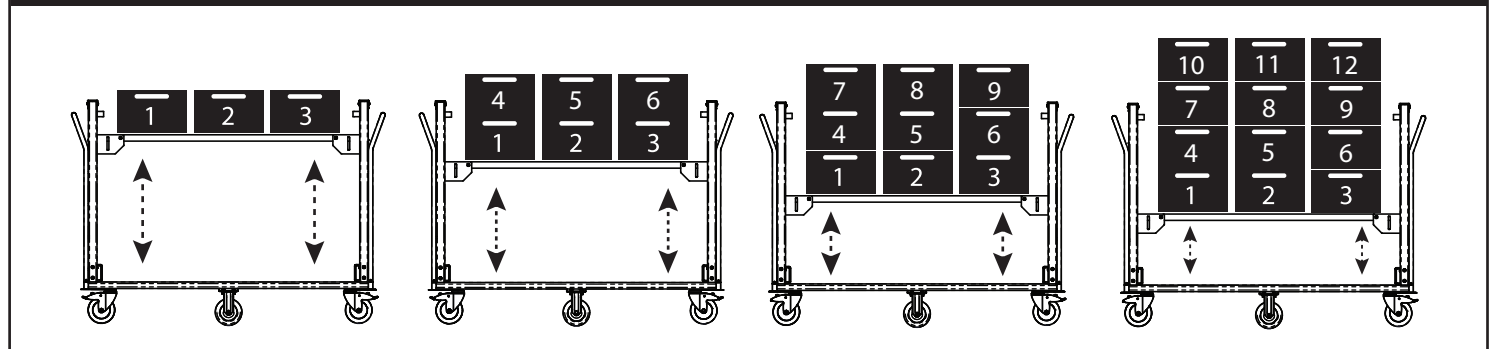

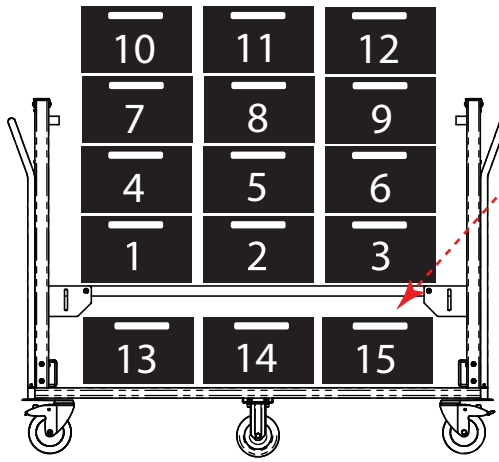


The top platform lowers to maximum low height once 180kg of load weight is achieved on the top platform. Once the auto levelling platform has reached its lowered position it is safe to continue loading the platform up to a maximum loading of 250kg.

The purpose of the top platform stopping at 260mm above the bottom platform is so that extra crates and/or empty crates and cartons can be stored there.

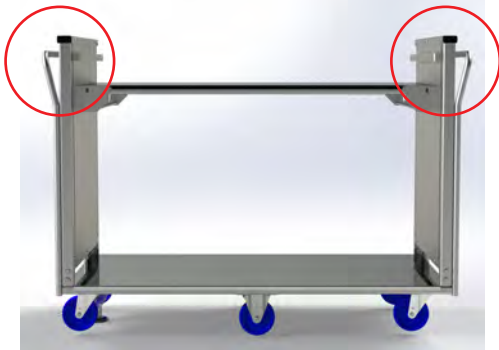

2 Handles

The trolley can be pushed and/or pulled from either end by using the handles provided on each end of the trolley.

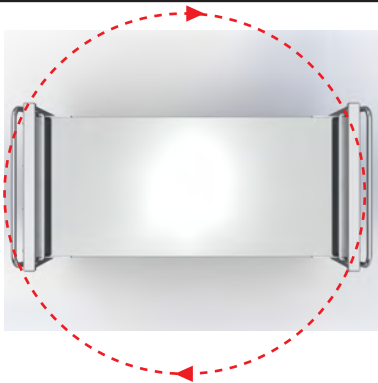

Turning The Trolley

The trolley is fitted with a centre wheel kit which enables it to be turned very easily around within its own length as shown the diagram.




To apply brake



To release brake

Foot Brake

The trolley is fitted with a press foot floor brake which can be used if required. Simply place your shoe on the pedal and apply pressure downwards which will activate the brake and to release place your shoe on the release arms and press downwards which will release the brake from the floor.

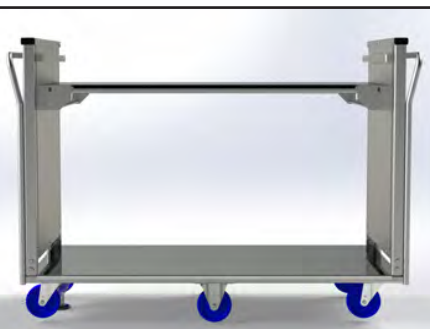

Cleaning / Maintenance

The trolley is virtually maintenance free however it is important to ensure that the platforms are kept clean and free from food or packaging debris. Clean with a damp cloth if necessary.

LIFTEX

Freecall: 1800 750 900 | Model: LT2024