

Ladders & Access Equipment



MHA
PRODUCTS

☎ 1800 750 900

Rolling Metal Step Stool

- This rolling step stool is the most popular in our range
- Spring loaded castors for rolling which spring upwards when you step on the stool
- Non-Slip rubber surface on both steps
- Powdercoated steel construction
- Top Diameter: 290mm
- Bottom Diameter: 454mm
- Height To Top Step: 435mm
- Load Rated: 250kg



| Code | Description |
|------|-------------|
|------|-------------|

| | |
|-------|--------------------------|
| 50508 | Rolling Metal Step Stool |
|-------|--------------------------|

General Purpose Plastic Step Stool



- Ideal for offices, libraries, and archive areas
- Strong plastic construction with non-slip steps
- 2 models available - general purpose and heavy duty for more demanding applications
- Anti-skid rubber feet
- Size: 510x510mm square
- Height: 370mm
- Unit Weight: 3.3kg
- Load Rated: 150kg

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|-------|------------------------------------|
| 50510 | General Purpose Plastic Step Stool |
|-------|------------------------------------|

Heavy Duty Plastic Step Stools **SURESTEP™**

- Ideal for offices, libraries, and archive areas with high use
- Strong plastic construction with non-slip steps
- 2 models available - Square version and round version with spring castors

Square Step Stool

- Base Size: 500x500mm
- Top Size: 400x400mm
- Height: 360mm
- Unit Weight: 5kg
- Load Rated: 150kg

Round Step Stool (with spring castors)

- Base Size: 500mm
- Top Size: 400mm
- Height: 360mm
- Unit Weight: 6kg
- Load Rated: 150kg



Round version has spring castors

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|-------|---------------------------|
| 50511 | Surestep - Square Version |
|-------|---------------------------|

| | |
|-------|---|
| 50512 | Surestep - Round Version (with castors) |
|-------|---|

Aluminium Step Stools

- Ideal for outdoor use or in food preparation areas where hose down is required
- Strong aluminium construction
- Non-Slip rubber feet
- Corrugated step platform
- Height adjustable legs on #50506 model
- Load Rated: 150kg
- Base Size: 450x450mm
- Top Size: 340x340mm



| Code | Description | Stool Height |
|-------|--|--------------|
| 50505 | Aluminium Step Stool | 360mm |
| 50506 | Aluminium Step Stool (adjustable leg height) | 370-450mm |



General Purpose Step Ladders

- Handy step ladders available in 2 and 3 step versions
- Load Capacity: 100kg
- Domestic rating
- Non-Slip feel and treads
- 450mm wide step

| Code | Description | Top Step Height | Unit Weight |
|-------|---------------|-----------------|-------------|
| HS202 | 2 Step Ladder | 480mm | 5kg |
| HS203 | 3 Step Ladder | 730mm | 6.5kg |

Heavy Duty Step Ladders

The Safety Step has extra large steps instead of narrow rungs which provide safety and comfort when in use.

- Engineered with lightweight yet sturdy aluminium construction
- Extra large steps (225mm x 300mm) with skid resistant rubber surface
- Fold flat when not in use - easy to store and transport
- Safety Step folds flat when not in use

Little **JUMBO**
LADDERS

Folds flat when not in use



| Code | Description | No. Of Steps | Height | Unit Weight | Safety Handrail |
|-------|------------------------------------|--------------|--------|-------------|-----------------|
| A5021 | Safety Step Ladder | 2 | 460mm | 5.1kg | n/a |
| A5031 | Safety Step Ladder | 3 | 690mm | 8.6kg | n/a |
| A5033 | Safety Step Ladder (with handrail) | 3 | 690mm | 10.6kg | Yes |
| A5041 | Safety Step Ladder | 4 | 920mm | 11.3kg | n/a |
| A5043 | Safety Step Ladder (with handrail) | 4 | 920mm | 13.0kg | Yes |
| A5053 | Safety Step Ladder (with handrail) | 5 | 1150mm | 15.3kg | Yes |




Aluminium Platform Ladders



- Available in platform heights from 0.9 metres to 2.1 metres
- Large anti-skid work platform with raised edges - keeps feet in side the platform for greater safety and comfort
- One piece, smooth operation - simply folds out and locks
- Platform size: 600 x 600mm
- Optional castor kits available
- Rated to 150kgs
- Complies to AS/NZS 1892:1998

Ladders & Access Equipment

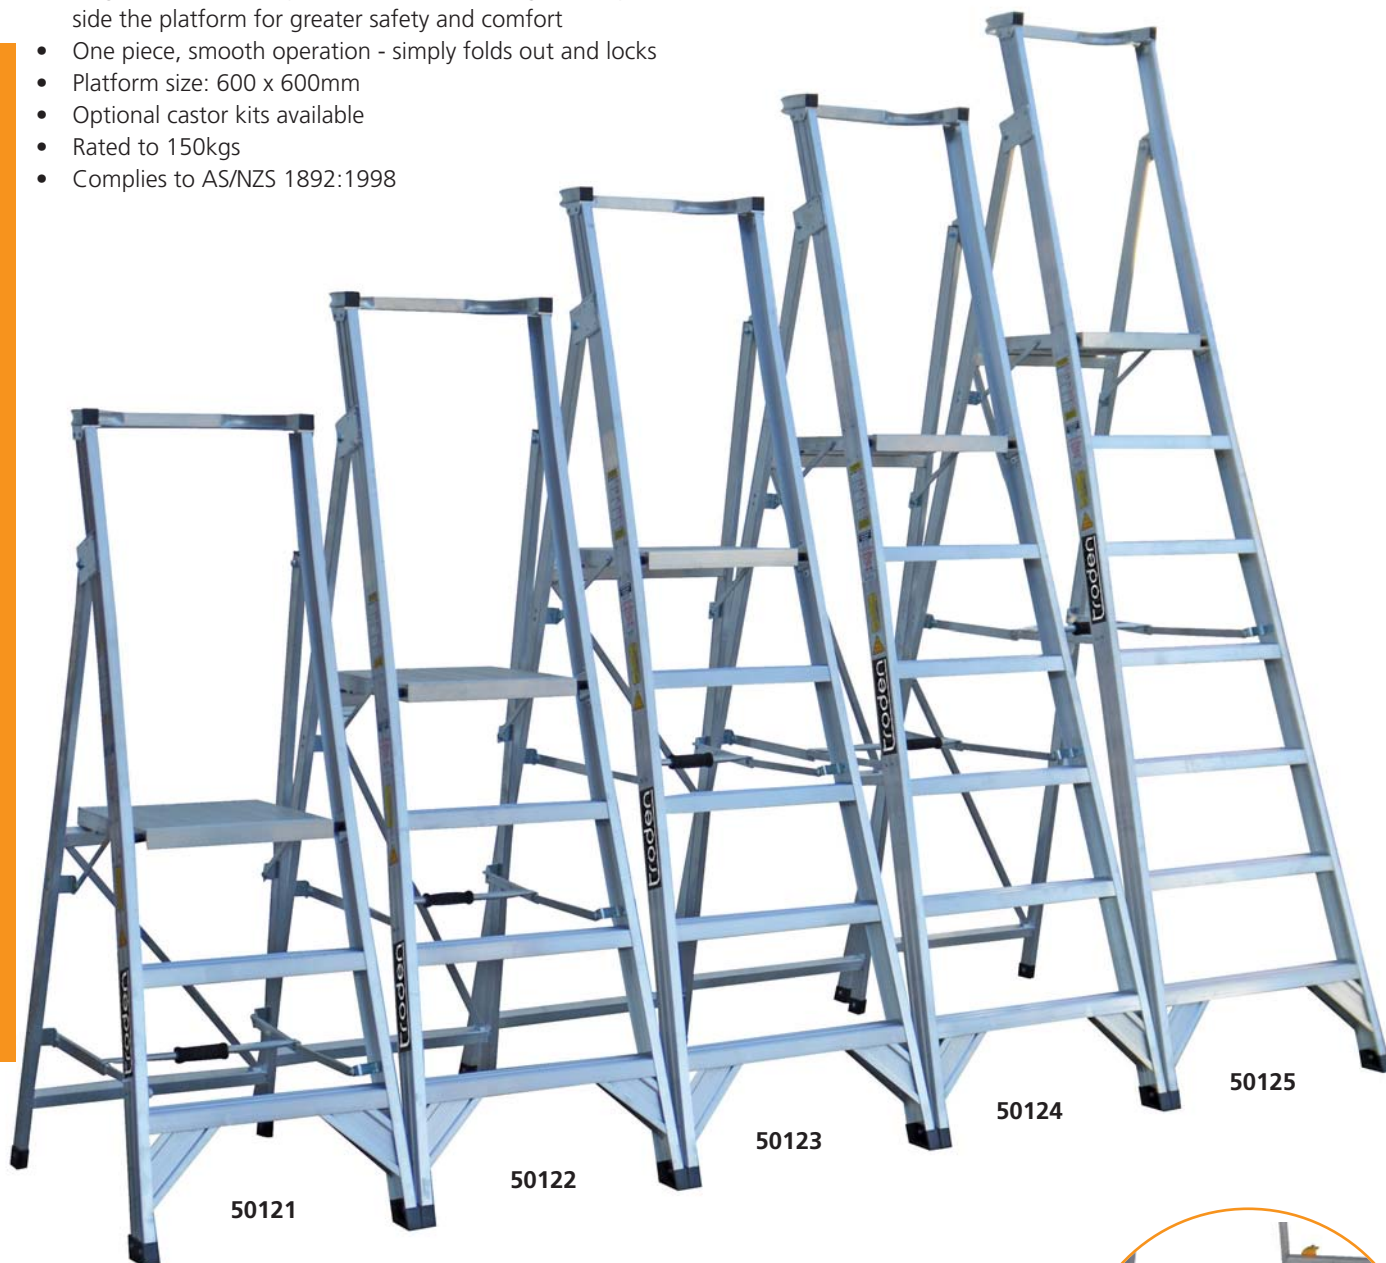

| Code | Description | No. Of Steps | Platform Height | Unit Weight |
|-------|----------------------------------|--------------|-----------------|-------------|
| 50121 | Aluminium Platform Ladder | 3 | 900mm | 10kg |
| 50122 | Aluminium Platform Ladder | 4 | 1200mm | 12kg |
| 50123 | Aluminium Platform Ladder | 5 | 1500mm | 13kg |
| 50124 | Aluminium Platform Ladder | 6 | 1800mm | 14kg |
| 50125 | Aluminium Platform Ladder | 7 | 2100mm | 17kg |
| 50139 | Platform Ladder Castor/Wheel Kit | | | |
| 50140 | Platform Ladder Safety Gate Kit | | | |

Fibreglass Platform Ladders



- Available in platform heights from 0.9 metres to 2.1 metres
- Large anti-skid work platform with raised edges - keeps feet in side the platform for greater safety and comfort
- One piece, smooth operation - simply folds out and locks
- Platform size: 600 x 600mm
- Optional castor kits available
- Rated to 150kgs
- Complies to AS/NZS 1892:1998



Ladders & Access Equipment

| Code | Description | No. Of Steps | Platform Height | Unit Weight |
|-------|----------------------------------|--------------|-----------------|-------------|
| 50130 | Fibreglass Platform Ladder | 3 | 900mm | 11kg |
| 50131 | Fibreglass Platform Ladder | 4 | 1200mm | 13kg |
| 50132 | Fibreglass Platform Ladder | 5 | 1500mm | 15kg |
| 50133 | Fibreglass Platform Ladder | 6 | 1800mm | 16kg |
| 50134 | Fibreglass Platform Ladder | 7 | 2100mm | 18kg |
| 50139 | Platform Ladder Castor/Wheel Kit | | | |
| 50140 | Platform Ladder Safety Gate Kit | | | |



Bailey Aluminium Platform Ladders

- Available in platform heights from 3-6 steps
- Platform size: 490 x 400mm
- Optional castor kit and tool tray available
- Rated to 150kgs
- Clever handrail design with magnets to secure tools and fasteners
- Anti-slip feet which increases stability
- Durable solid nylon block on stile to platform connection
- Overlocking internal pivot arms under the platform increase stability and resistance to 'ladder walk'
- Complies to AS/NZS 1892:1998




| Code | Description | No. Of Steps | Platform Height | Unit Weight |
|-------|----------------------------------|--------------|-----------------|-------------|
| B1071 | Aluminium Platform Ladder | 3 | 900mm | 11kg |
| B1072 | Aluminium Platform Ladder | 4 | 1200mm | 12kg |
| B7073 | Aluminium Platform Ladder | 5 | 1500mm | 14kg |
| B7074 | Aluminium Platform Ladder | 6 | 1800mm | 16kg |
| B7075 | Tool Tray Kit | | | |
| B7076 | Platform Ladder Castor/Wheel Kit | | | |

Bailey Fibreglass Platform Ladders

- Available in platform heights from 3-6 steps
- Platform size: 490 x 400mm
- Optional castor kit and tool tray available
- Rated to 150kgs
- Clever handrail design with magnets to secure tools and fasteners
- Anti-slip feet which increases stability
- Fibreglass design - Electro-Safe, Suitable for electrical work
- Durable solid nylon block on stile to platform connection
- Overlocking internal pivot arms under the platform increase stability and resistance to 'ladder walk'
- Complies to AS/NZS 1892:1998




| Code | Description | No. Of Steps | Platform Height | Unit Weight |
|-------|----------------------------------|--------------|-----------------|-------------|
| B1061 | Fibreglass Platform Ladder | 3 | 900mm | 12kg |
| B1062 | Fibreglass Platform Ladder | 4 | 1200mm | 14kg |
| B7063 | Fibreglass Platform Ladder | 5 | 1500mm | 15kg |
| B7064 | Fibreglass Platform Ladder | 6 | 1800mm | 18kg |
| B7065 | Tool Tray Kit | | | |
| B7066 | Platform Ladder Castor/Wheel Kit | | | |

P170 Job Station Industrial Ladder



More than just a platform stepladder, the P170 has a range of features aimed at improving safety and productivity.

- Massive 610 x 460mm platform deck
- Huge 170kg load rating
- Convenient carry handle
- Super strong tread design
- Multi-functional handrail
- Large robust feet
- Innovative brace and castor system (castors included)
- Huge platform area (610 x 460mm) adds comfort and stability
- New 'trapezoidal tread design' provides an incredibly strong tread to stile joint
- Multi-function handrail with optional 'DropLok' accessories converts a hand rail into a Job Station (15kg capacity)
- Fully reinforced polypropylene platform with metal rod inserts for optimal strength
- Diamond plate 'deck pattern' provides an anti-slip standing area
- Extra strong, heavy duty aluminium construction for superior durability
- Large anti-slip feet for maximum stability and durability
- Convenient carry handle allows for easy transport from job to job
- 360 castors for improved mobility and improved productivity
- Fully integrated bracing and castor system – industry leading design (castors included)
- Made to AS/NZS 1892



Ladders & Access Equipment




| Code | Description | Ladder Height | Platform Height | Reach Height | Fully Open Dimensions (HxWxD) | Unit Weight |
|---------|-------------------------|---------------|-----------------|--------------|-------------------------------|-------------|
| FS13538 | P170 Job Station Ladder | 1.86m | 0.9m | 2.9m | 1777x702x1003mm | 16.9kg |
| FS13539 | P170 Job Station Ladder | 2.16m | 1.2m | 3.2m | 2068x731x1159mm | 18.4kg |
| FS13540 | P170 Job Station Ladder | 2.47m | 1.5m | 3.5m | 2359x765x1315mm | 19.9kg |
| FS13541 | P170 Job Station Ladder | 2.77m | 1.8m | 3.8m | 2649x803x1471mm | 21.9kg |
| FS13542 | P170 Job Station Ladder | 3.07m | 2.0m | 4.0m | 2940x856x1625mm | 27.4kg |
| FS13543 | P170 Job Station Ladder | 3.38m | 2.3m | 4.3m | 3231x889x1781mm | 28.5kg |
| FS13544 | P170 Job Station Ladder | 3.99m | 2.9m | 4.9m | 3813x956x2093mm | 33.2kg |
| FS13545 | P170 Job Station Ladder | 4.6m | 3.5m | 5.5m | 4395x1032x2405mm | 37.6kg |



Steel Heavy Duty Rolling Platform

- Provides ladder type access
- Heavy duty zinc plated steel construction
- Platform heights from 705 to 2800mm
- Platform Size: 735x810mm
- Unit Width: 810mm
- Large wheel base and platform area ensures high stability
- Easy lock castor system locks platform firmly in place while in use
- Raised bottom step for easy mobility
- Step Depth: 150mm
- Vertical Rise Between Steps: 235mm
- Fold out stability arms on 9-12 step models
- Available with optional walk through gate at rear

Supplied flatpack - Assembly available on request

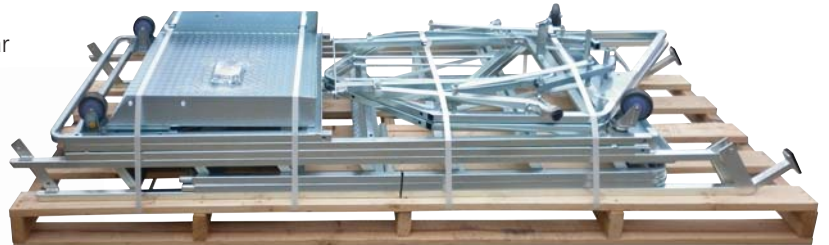

Easy Lock System



| Code | Description | No. Of Steps | Platform Height | Unit Length (base) | Unit Weight |
|-------|------------------------|--------------|-----------------|--------------------|-------------|
| A1681 | Steel Rolling Platform | 3 | 705mm | 1105mm | 61kg |
| A1682 | Steel Rolling Platform | 4 | 940mm | 1295mm | 64kg |
| A1683 | Steel Rolling Platform | 5 | 1175mm | 1467mm | 66kg |
| A1684 | Steel Rolling Platform | 6 | 1410mm | 1645mm | 73kg |
| A1685 | Steel Rolling Platform | 7 | 1650mm | 1820mm | 84kg |
| A1686 | Steel Rolling Platform | 8 | 1880mm | 1990mm | 95kg |
| A1687 | Steel Rolling Platform | 9 | 2130mm | 2155mm | 114kg |
| A1688 | Steel Rolling Platform | 10 | 2300mm | 2320mm | 133kg |
| A1689 | Steel Rolling Platform | 11 | 2560mm | 2500mm | 150kg |
| A1690 | Steel Rolling Platform | 12 | 2800mm | 2750mm | 165kg |

Ladderweld Access Platform



Bailey Ladderweld Access Platforms are designed for safe, easy and efficient use in warehousing, vehicle maintenance, mining, aviation and heavy industry workplaces.

- Access Platform 2-In-1 With Bonus Work Shelf
- Super strong 'fully welded' design fabricated from heavy duty aluminium
- Steel bracing under bottom tread and side bracing provides additional protection from impact damage
- 100mm deep treads improve safety and comfort when climbing
- Suited to 'high frequency' use
- Walk-thru' design for stock picking and access to mezzanine floors, vehicle access and warehousing
- Large 125mm wheels – improved portability and 'easy glide' action
- Large stable work platform (safe and stable) – 590mm x 800mm
- Manually operated braking system with high-vis powder coated activation arm helps minimize unauthorised access
- Two safety gates fitted (a 2 in 1 product allowing for walk-thru access)
- Toeboard on three sides (helps secure tools/accessories)
- Shelf included
- Made to AS/NZS 1892.1
- 170kg load rating
- Industrial duty rating for use on commercial sites
- Meets Work Cover requirements (safety gate + 900mm handrail, toeboard)
- Supplied as a 'flat pack' for optimal transporting however can be assembled on request - Please contact us for assembly cost

ACCESS PLATFORM

2-in-1 with bonus work shelf



| Code | Description | No. Of Steps | Platform Height | Reach Height | Fully Open Size | Unit Weight |
|-------|-----------------------------|--------------|-----------------|--------------|-----------------|-------------|
| 13591 | Ladderweld Access Platform | 3 | 828mm | 2.8m | 724x1168mm | 38.1kg |
| 13592 | Ladderweld Access Platform | 4 | 1104mm | 3.1m | 764x1309mm | 40.6kg |
| 13593 | Ladderweld Access Platform | 5 | 1381mm | 3.4m | 804x1451mm | 43kg |
| 13594 | Ladderweld Access Platform | 6 | 1656mm | 3.7m | 844x1592mm | 46kg |
| 13595 | Ladderweld Access Platform | 7 | 1933mm | 3.9m | 884x1733mm | 48.5kg |
| 13596 | Ladderweld Access Platform | 8 | 2209mm | 4.2m | 924x1875mm | 51kg |
| 13597 | Ladderweld Access Platform | 10 | 2761mm | 4.8m | 1003x2157mm | 62kg |
| 13598 | Ladderweld Access Platform | 12 | 3313mm | 5.3m | 1083x2440mm | 69kg |
| 13599 | Ladderweld Access Platform | 14 | 3866mm | 5.9m | 1164x2723mm | 76.4kg |
| LWASS | Assembly of Access Platform | | | | | |



Reach height assumes a 1.70m person with a vertical 0.30m reach



Mezzanine Pallet Safety Roll Over Gate

The mezzanine Roll-Over Gate is the ideal solution for providing ultimate personnel protection whilst allowing fork truck loading access to the Mezzanine Floor.

Our mezzanine Roll-Over Gate is permanently anchored at the loading edge of the Mezzanine Floor providing protection from the fall edge at all times. The Verge Roll-Over Gate works on the principle of providing hand, knee and kick rails to either side of the palletized load by simply swinging the evenly balanced gate over the top of the load, protecting persons from the fall edge which eliminates the risk of fall injury.

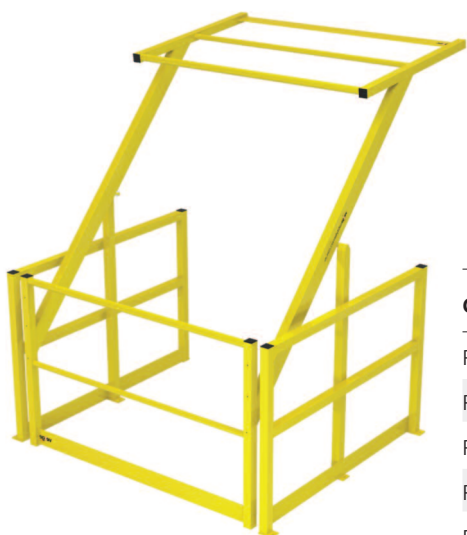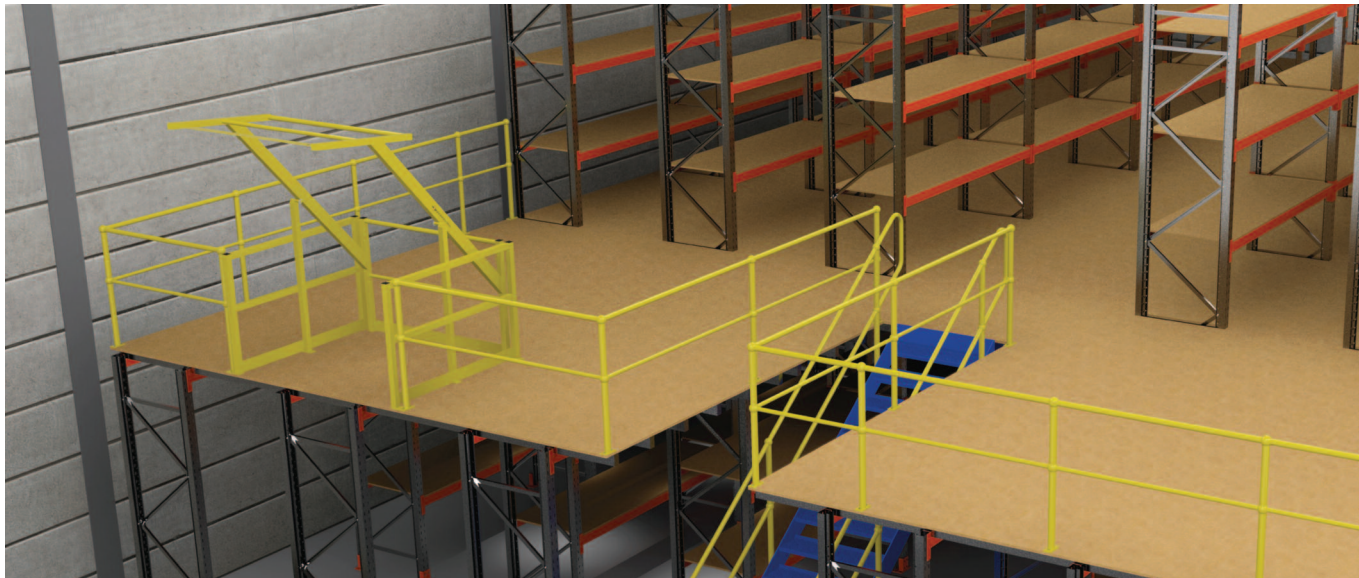

| Code | Description | Overall Size (WxH) | Pallet Size (WxDxH) |
|--------|----------------|--------------------|---------------------|
| PSG181 | Roll Over Gate | 1900x2250mm | 1400x1250x1800mm |
| PSG182 | Roll Over Gate | 1900x2860mm | 1400x1250x2400mm |
| PSG241 | Roll Over Gate | 2400x2250mm | 2000x1250x1800mm |
| PSG242 | Roll Over Gate | 2400x2860mm | 2000x1250x2400mm |
| PSG243 | Roll Over Gate | 3475x2300mm | 3000x1250x1800mm |
| PSG244 | Roll Over Gate | 3475x2650mm | 3000x1250x2400mm |

Mezzanine Access Ladder



- Conveniently stores flat against a wall when not in use
- For use, the operator simply pulls the ladder away from the wall
- Makes use of the space above offices, tea rooms, etc.
- Two hand rails assist safe and easy climbing
- Safe step through design with 600mm wide ladder
- Fast installation with universal fixing bracket and simple two bolt fixing
- Other sizes up to 4700mm available on request



Folds back against wall when not in use



Easily pulls out from wall to work as access ladder



Strong, safe with handrails both sides



Safety access bar which flips over for access

View video on our website,
www.mhaproducts.com.au/Mezzanine-Access-Ladders



| Code | Description | Mezz Height Range | Pull Out From Wall |
|-------|----------------------------|-------------------|--------------------|
| A1940 | Mezzanine Access Ladder 1 | 1310-1420mm | 597-845mm |
| A1941 | Mezzanine Access Ladder 2 | 1420-1545mm | 642-908mm |
| A1942 | Mezzanine Access Ladder 3 | 1545-1675mm | 690-980mm |
| A1943 | Mezzanine Access Ladder 4 | 1675-1820mm | 743-1055mm |
| A1944 | Mezzanine Access Ladder 5 | 1820-1975mm | 799-1139mm |
| A1945 | Mezzanine Access Ladder 6 | 1975-2145mm | 861-1229mm |
| A1946 | Mezzanine Access Ladder 7 | 2145-2330mm | 928-1327mm |
| A1947 | Mezzanine Access Ladder 8 | 2330-2529mm | 1001-1433mm |
| A1948 | Mezzanine Access Ladder 9 | 2529-2744mm | 1091-1548mm |
| A1949 | Mezzanine Access Ladder 10 | 2744-2977mm | 1165-1672mm |
| A1950 | Mezzanine Access Ladder 11 | 2977-3225mm | 1262-1807mm |
| A1951 | Mezzanine Access Ladder 12 | 3225-3385mm | 1312-1692mm |
| A1952 | Mezzanine Access Ladder 13 | 3385-3675mm | 1417-2043mm |
| A1953 | Mezzanine Access Ladder 14 | 3675-3990mm | 1532-2210mm |
| A1954 | Mezzanine Access Ladder 15 | 3990-4330mm | 1656-2392mm |

The pull out from wall measurements are based on pull out at 60 to 70 degree angle





5.5 Tonne Capacity 1 Piece Container Ramp



This container ramp is a great general purpose ramp for unloading containers using pallet trucks or forklifts.


This is a one piece unit with forklift slots at the front for easy transport.

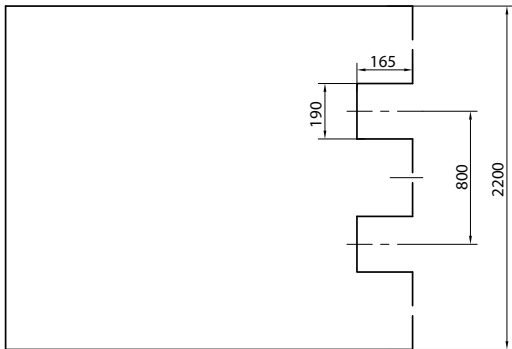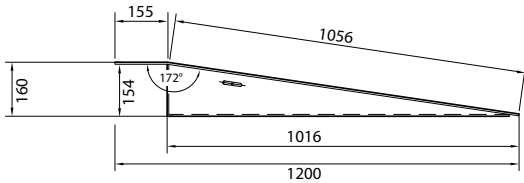

| Code | Description |
|-------|--------------------------|
| R2995 | 5.5 Tonne Container Ramp |

Specifications



- Capacity: 5500kgs
- Unit Weight: 160kgs
- Finish: Painted yellow
- Width: 2200mm
- Height: 160mm
- Length: 1200mm
- Supplied with chain & D-shackle as pictured

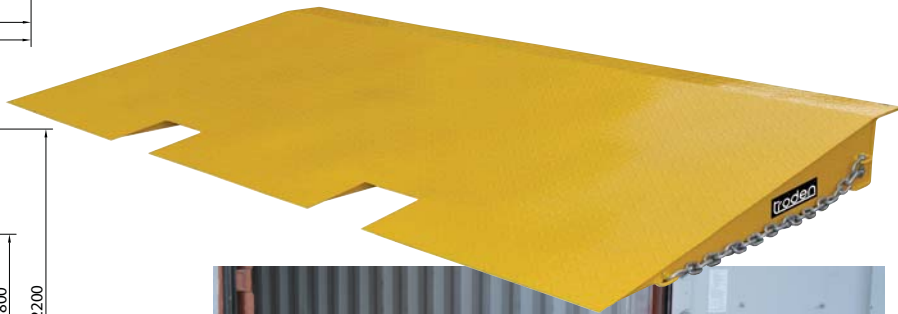

7.5 Tonne Capacity 1 Piece Container Ramp

This container ramp is a heavy duty ramp for unloading containers of heavy products and machinery using a forklift.

This is a one piece unit with forklift slots at both the side and front for easy transport.

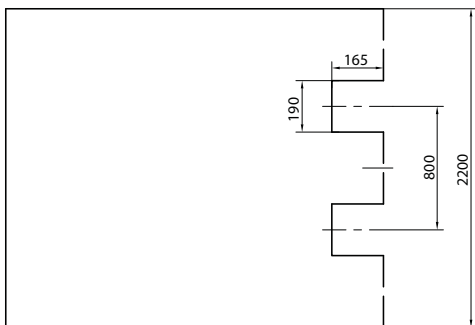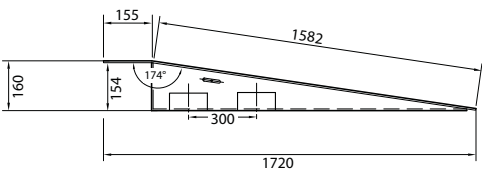


Specifications

- Capacity: 7500kgs
- Unit Weight: 240kgs
- Finish: Painted yellow
- Width: 2300mm
- Height: 160mm
- Length: 1720mm
- Fork Pocket Size (side): 80x165mm
- Supplied with chain & D-shackle as pictured

Code Description

| | |
|-------|--------------------------|
| R2996 | 7.5 Tonne Container Ramp |
|-------|--------------------------|

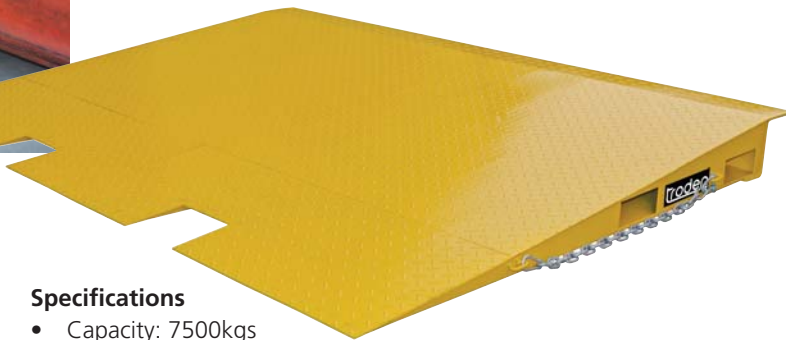

7 Tonne Capacity Folding Container Ramp

This container ramp is designed primarily for bridging into a standard container from ground level that is slightly uneven due to its self-levelling lip.

The ramp footing fold has handles which you can easily fold back to move the ramp using the fork slots.



Specifications

- Capacity: 7000kgs
- Unit Weight: 275kgs
- Finish: Painted yellow
- Width: 2200mm
- Length: 2000mm
- Fork Pocket Size: 165x60mm
- Fork Pocket Centres: 775mm
- Supplied with chain & D-shackle as pictured

troden



Ladders & Access Equipment

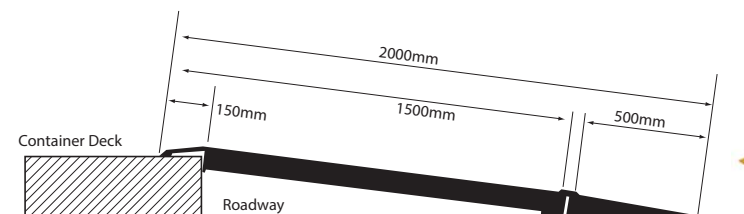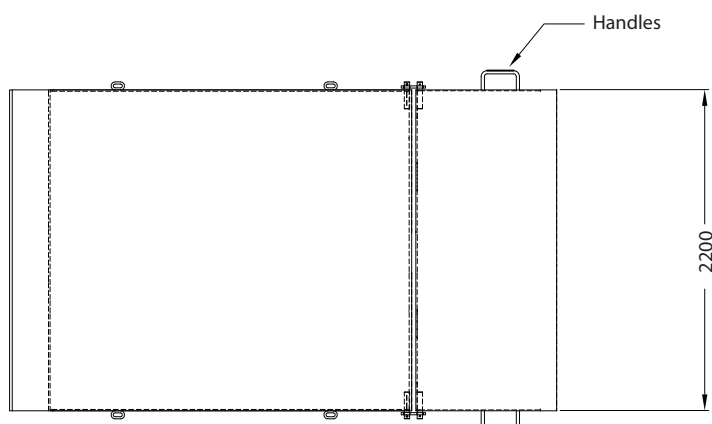

| Code | Description |
|-------|--------------------------------|
| R2901 | 7 Tonne Folding Container Ramp |

8 Tonne Heavy Duty Container Ramp





The R2905 container ramp is a heavy duty ramp for unloading containers of heavy products with a large forklift.

This ramp has been designed for fast positioning and removal with tine pockets on the side plus pop up tine slots in the top for front removal.

Comes standard with 100mm raised side plates which ensure the forklift remains on the ramp.

Specifications

- Capacity: 8000kgs
- Unit Weight: 410kgs
- Finish: Enamel Painted
- Width: 2320mm
- Length: 1800mm
- Top Fork Slot Centres: 518mm

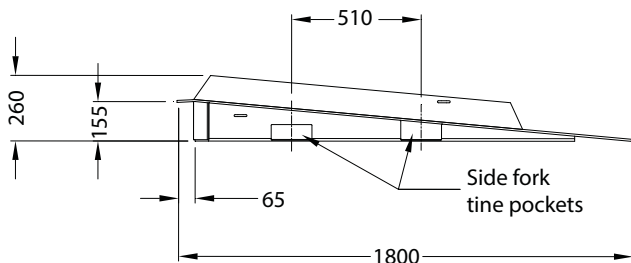

Pop-up fork slots which make it easy to move around with a forklift

| Code | Description |
|-------|-----------------------------------|
| R2905 | 8 Tonne Heavy Duty Container Ramp |

8 Tonne Heavy Duty Container Ramp (extra long)



The R2908 extra long container ramp has an overall length of 3 metres (1.5 metres of which is horizontal allowing easy placement and removal of the first and second line of pallets in a container).

This ramp has been designed for fast positioning and removal with tine pockets on the side plus pop up tine slots in the top for front removal.

Comes standard with 100mm raised side plates which ensure the forklift remains on the ramp.

Specifications

- Capacity: 8000kgs
- Unit Weight: 600kgs
- Finish: Enamel Painted
- Width: 2320mm
- Length: 3000mm
- Top Fork Slot Centres: 718mm

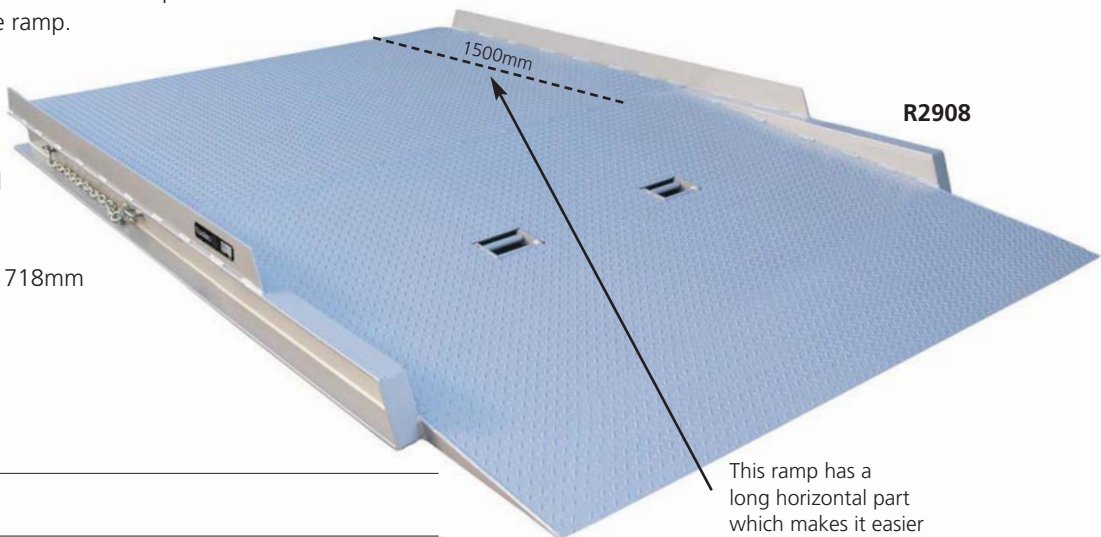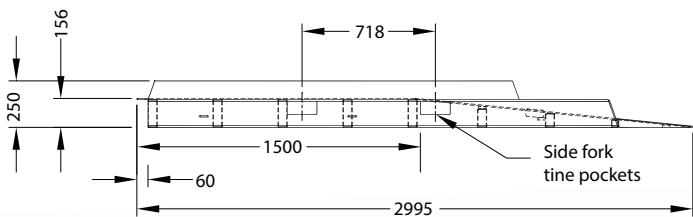

This ramp has a long horizontal part which makes it easier to remove the first row of pallets from a container



| Code | Description |
|-------|-----------------------------------|
| R2908 | 8 Tonne Extra Long Container Ramp |

Truck Container Load / Unloading Ramps




These truck ramps are made for loading and unloading containers while the container is still on the truck or trailer. Truck ramps are a quick and easy way to load and unload containers and trucks and saves the cost of having the containerside unloaded onto ground level.




This truck ramp is a manually operated hydraulic controlled unit which means no power is required with quick and easy operation to raise and lower the ramp to the desired levels.

Specifications

- Capacity up to 8000Kgs - wheels included
- Great solution to loading/unloading trucks or shipping containers while still on the truck
- Ideal sized top flat deck area so forklift can level to load/unload first row of pallets in truck or container
- Simply moved around yard by safely lifting tail flap and pushing to move around on the tyres
- Dimensions: 10.3m (L) x 2.1m (W) x 1.1m (H)
- Shipping Size: 9.0m long x 2.1mm wide x 1.36m high
- Clearance Width between Rails: 1.99m (W)
- Adjustable Height Range: 1.2m to 1.6m
- Unit Weight: 2300kgs



View video on our website here,
www.mhaproducts.com.au/R2910

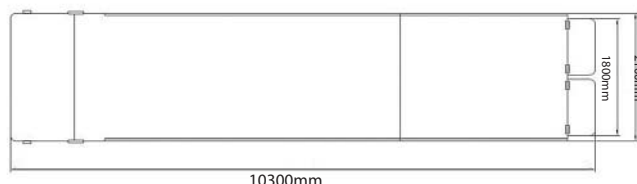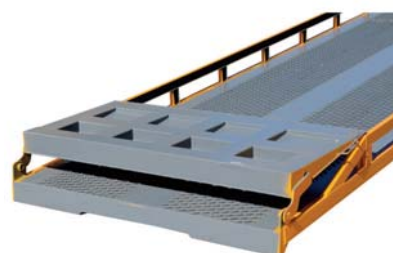

Code Description

R2910 8 Tonne Capacity Truck Loading Ramp



Forklift Safety Cage/Work Platform




- Manufactured to meet Australian Standards AS 2359-1
- Zinc plated finish
- Designed to carry 2 persons (250kg max)
- Mesh safety screen
- Toe boards all sides with skid resistant floor plate
- Inward opening, self closing door
- Internal handrail with safety loops to hook safety harness
- Full length fork sleeves
- Castors can be fitted to the bottom of cage for easy maneuverability in warehouse or yard
- Floor Dimensions Inside: 1000x1100mm
- Overall Height: 2000mm
- Height to Railing: 1000mm
- Fork Pocket Size: 160x60mm
- Fork Pocket Centres: 640mm
- Unit Weight: 110kg
- Supplied as flatpack for easy storage and transport however can be ordered with assembly

NO MORE THAN 2 PERSONS MAY BE LIFTED.
WEIGHT OF PLATFORM 110KG.
THE LOAD INCLUDING PERSONNEL & EQUIPMENT SHALL NOT EXCEED 250KG
USE ONLY ON INDUSTRIAL TRUCKS HAVING A CAPACITY OF 1800KG (COUNTERBALANCED) OR 1080KG (REACH TRUCK) AS APPROVED.
DO NOT USE IN PROXIMITY TO LIVE ELECTRICAL EQUIPMENT.
FOR USE ONLY AS APPROVED BY STATE STATUTORY AUTHORITY.



Supplied with tool tray

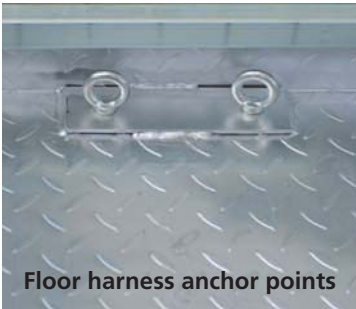

Floor harness anchor points



| Code | Description |
|--------|--|
| FC2901 | Forklift Safety Cage/Work Platform (supplied flatpack) |
| FCASS | Forklift Safety Cage Assembly Fee |

Safety Harnesses

- 2m Shock Absorbing Lanyard with one double action snap hook at one end and one scaffold hook at the other end comes with a full body harness with two chest attachment, fall arrest loops and a dorsal attachment D-ring.
- Approved to AS/NZS1891



| Code | Description |
|-------|-------------------------------|
| SH450 | Full Body Harness and Lanyard |

Order Picker Platform Cages

Manufactured in strict accordance with AS 2359.1 and AS 2359.6, the FC2906 Order Picking Platform Cage must only be used by an approved Order Picking Forklift.

FC2906 Comes fitted with a full width outward opening gate, enabling access to stock where required.

FC2905



- Safe Working Load: 1000kg
- Load Centre: 600mm
- Unit Weight: 180kg
- Handrail Height: 1000mm
- Fork Pocket Size: 140 x 65mm
- Fork Pocket Centres: 560mm
- Enamel paint finish



FC2906

| Code | Description |
|--------|--|
| FC2905 | Order Picking Cage |
| FC2906 | Order Picking Cage (with opening gate) |

Forklift Goods Cage

The Forklift Goods Cages are suitable for storage and transport of furniture and whitegoods, and is ideal for the transportation of goods between ground and mezzanine levels. Supplied standard with hinged ramp to enable furniture trolleys to be wheeled into the cage.

These Forklift Goods Cages are NOT designed or certified to convey personnel.

- Safe Working Load: 1500kg
- Manufactured strictly in accordance with Australian Standard AS 2359
- Fork Pocket Size: 185 x 85mm
- Fork Pocket Centres: 800mm
- Standard finish is enamel painted
- Unit Weight: 130kg
- External Dimensions: 1550x1150x1220mm (WxHxD)
- Supplied flatpack however can be assembled if required



| Code | Description |
|--------|-----------------------------------|
| FC2904 | Forklift Goods Cage |
| FCASS | Forklift Safety Cage Assembly Fee |




Goods Cage (with gate)

Safely convey loose or palletted goods using either forklift or crane.

The full width gate allows 1200mm square pallets to be placed inside the cage if required.

Crane Lug stacking corners allow the cages to be stacked on top of each other - 3 high when empty, 2 high when full.

- 4 Point Lift
- Lift Capacity 1000kg
- Unit Weight 175kg
- Stackable
- Zinc Plated Finish
- Lifting chains not included

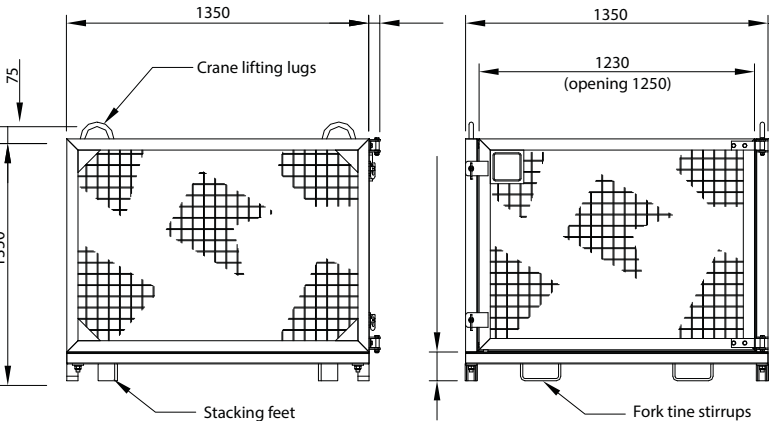


| Code | Description | Internal Size | External Size | Height |
|--------|------------------------|---------------|---------------|---------------------------|
| FC2928 | Goods Cage (with gate) | 1230x1230mm | 1350x1350mm | 1078mm + (75mm lift lugs) |

Crane Lift Brick Cage

The brick cage is designed to convey pallets of bricks or similar loose products safely to a work location via overhead crane.

Suitable for 1200mm square pallets (1240mm clear inside), and up to 1500mm overall height.

Unit is supplied standard flatpacked (1750 x 1370 x 475mm), or may be fully assembled upon request.

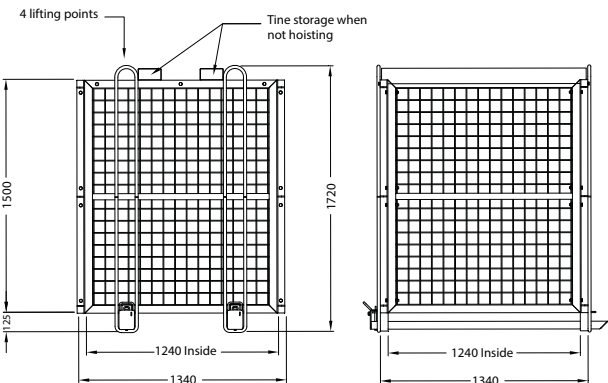

- 4 Point Lift
- Lift Capacity 2000kg
- Unit Weight 255kg
- Zinc Plated Finish
- Up to 1500mm high Pallets
- Tine storage when not hoisting
- Lifting chains not included






| Code | Description |
|--------|-------------------------------------|
| FC2925 | Crane Lift Brick Cage - 2000kg Cap. |

1 Person Crane Platform Cage

The FC2961 1 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of one person.

Work performed in this Cage shall be limited to special tasks of short duration in situations where necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Fork Arm slippers are provided for transport purposes only. The standard finish on the Cage is painted enamel in 'Safety Yellow'.

All Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

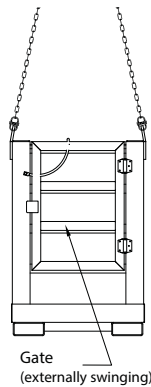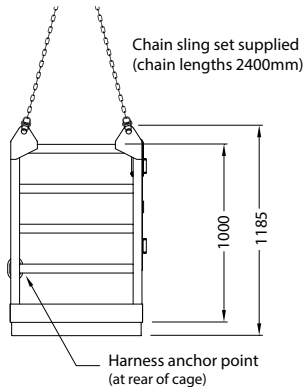

- Suitable for 1 person
- Safe Working Load: (SWL) 250kg
- Unit Weight: 120kg
- Fork Pocket Size: 165x65mm
- Pocket Centres: 555mm
- Supplied with 2400mm lifting chains



| Code | Description |
|--------|------------------------------|
| FC2961 | 1 Person Crane Platform Cage |


1 Person Crane Platform Cage (with mesh roof)

The FC2962 1 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of one person.

Work performed in this Cage shall be limited to special tasks of short duration in situations where necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Fork Arm slippers are provided for transport purposes only. The standard finish on the Cage is painted enamel in 'Safety Yellow'.

All Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

- Suitable for 1 person
- Safe Working Load: (SWL) 250kg
- Unit Weight: 150kg
- Fork Pocket Size: 165x65mm
- Pocket Centres: 555mm
- Supplied with 1200mm lifting chains

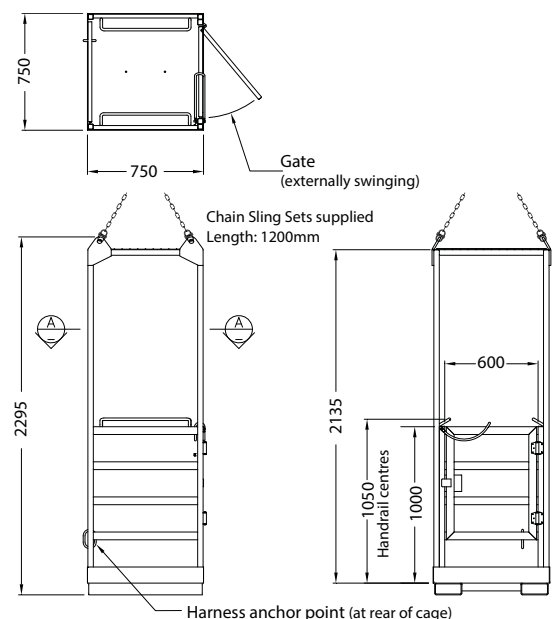

| Code | Description |
|--------|---|
| FC2962 | 1 Person Crane Platform Cage (with mesh roof) |



4 Person Crane Platform Cage

The FC2945 4 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of four people.

Work performed in this cage shall be limited to special tasks of short duration in situations where it is necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Integrated fork arm slippers are provided for transport purposes only. The standard finish is Zinc with a safety yellow base painted enamel finish.

All Crane Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

- Suitable for 4 people
- Safe Working Load: (SWL) 500kg
- Unit Weight: 270kg
- Dimensions: 1200x1100x1200mm (WxLxH)
- Supplied complete with lifting chains
- For full specification sheet please visit our website



| Code | Description |
|--------|------------------------------|
| FC2945 | 4 Person Crane Platform Cage |

4 Person Crane Platform Cage (with mesh roof)

The FC2946 4 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of four people.

Work performed in this cage shall be limited to special tasks of short duration in situations where it is necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Integrated fork arm slippers are provided for transport purposes only. The standard finish is Zinc with a safety yellow base painted enamel finish.

All Crane Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

- Suitable for 4 people
- Safe Working Load: (SWL) 500kg
- Unit Weight: 310kg
- Dimensions: 1200x1100x2400mm (WxLxH)
- Supplied complete with lifting chains
- For full specification sheet please visit our website



| Code | Description |
|--------|---|
| FC2946 | 4 Person Crane Platform Cage (with mesh roof) |

6 Person Crane Platform Cage

The FC2947 6 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of six people.

Work performed in this cage shall be limited to special tasks of short duration in situations where it is necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Integrated fork arm slippers are provided for transport purposes only. The standard finish is Zinc with a safety yellow base painted enamel finish. Fork Arm slippers are provided for transport purposes only.

All Crane Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

- Suitable for 6 people
- Safe Working Load: (SWL) 750kg
- Unit Weight: 415kg
- Dimensions: 1200x2400x1200mm (WxLxH)
- Supplied complete with lifting chains
- For full specification sheet please visit our website



| Code | Description |
|--------|------------------------------|
| FC2947 | 6 Person Crane Platform Cage |

6 Person Crane Platform Cage (with mesh roof)

The FC2948 6 person Crane Cage Work Platform has been designed strictly in accordance with Australian Standard AS 1418.17 and is suitable for a maximum of six people.

Work performed in this cage shall be limited to special tasks of short duration in situations where it is necessary to elevate personnel where it is not practicable to erect scaffolds or use a specially designed device. Integrated fork arm slippers are provided for transport purposes only. The standard finish is Zinc with a safety yellow base painted enamel finish. Fork Arm slippers are provided for transport purposes only.

This Cage can be manufactured to suit First Aid Rescue applications.

All Crane Cages are supplied with a Load Test Certificate, Instructions for usage, Risk Control Measures and Workcover registration.

- Suitable for 6 people
- Safe Working Load: (SWL) 750kg
- Unit Weight: 500kg
- Dimensions: 1200x2400x2352mm (WxLxH)
- Supplied complete with lifting chains
- For full specification sheet please visit our website



| Code | Description |
|--------|---|
| FC2948 | 6 Person Crane Platform Cage (with mesh roof) |

See Page 253

Double Size Stillage Cage

See Page 252

Stillage Cage



Stackable Stillage Cages

See Page 254

See Page 254

Wire Pallet Cages



See Page 255

Stillage Mesh Cages



